



1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

Product Evaluation Report

of

**Domadeco Corporation
Outswing Doors w/Sidelites
(HVHZ) (Impact)**

for

Florida Product Approval

Report No. 9310

FL# FL46927

Current Florida Building Code

Method: 1 – A (Certificate Method)
Category: Exterior Doors
Sub – Category: Swinging Exterior Door Assemblies
Product: Outswing Doors w/Sidelites
(HVHZ) (Impact)
Materials: PA38/6060-T66 Aluminum
Product Dimensions: Refer to Installation Instructions, DOM006

Prepared for:

**Domadeco Corporation
7455 Arroyo Crossing, Suite 220
Las Vegas, NV 89113**

Prepared by:

Hermes F. Norero, P.E.


Florida Professional Engineer # 73778

Date: 9/9/2024

Contents:

Evaluation Report Pages 1 – 3

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2024.09.13 05:57:00 -04'00'

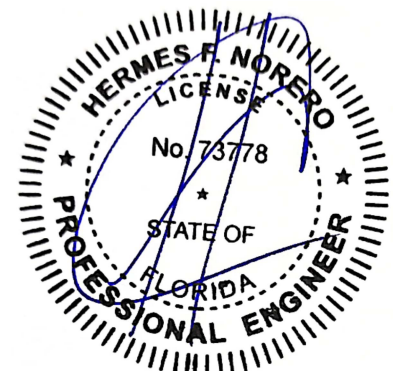

Hermes F. Norero, P.E.
Florida No. 73778

Manufacturer: Domadeco Corporation

Product Category: Exterior Doors

Product Sub-Category: Swinging Exterior Door Assemblies

Compliance Method: State Product Approval Method (1)(a)

Product Name: Outswing Doors w/Sidelites
(HVBZ) (Impact)

Scope: This is a Product Evaluation Report issued by Hermes F. Norero, P.E. (FL # 73778) for **Domadeco Corporation** based on Method 1a of the State of Florida Product Approval, Florida Department of Business and Professional Regulation - Florida Building Commission.

Hermes F. Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the current Florida Building Code.

See Installation Instructions **DOM006**, signed and sealed by Hermes F. Norero, P.E. (FL # 73778) for specific use parameters.

Limits of Use:

1. This product has been evaluated and is in compliance with the current Florida Building Code, including the "High Velocity Hurricane Zone" (HVBZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with the current Florida Building Code and does not require an impact resistant covering.
4. Site conditions that deviate from the details of drawing **DOM006** require further engineering analysis by a licensed engineer or registered architect.
5. See Installation Instructions **DOM006** for size and design pressure limitations.

Certification Agency:

The manufacturer has demonstrated compliance of manufacture of products in accordance with the Florida Building Code for manufacturing under an approved certification agency through **National Accreditation & Management Institute** (FBC Organization #CER1773).

Performance Standards:

The product described herein has been tested per:

- TAS 201-94
- TAS 202-94
- TAS 203-94
- ASTM E283-19
- ASTM E331-00(16)
- ASTM E1886-19
- ASTM E1996-20

Referenced Data:

1. Product Testing performed by **Blackwater Technical Services, Inc.**
(FBC Organization # TST10394)
Report #: BT-DOM-24-001, Report Date: 05/31/24,
Signed and sealed by Mike Caldwell, FL P.E. # 49979
2. Certification Agency Entity
National Accreditation & Management
(FBC Organization #CER1773)
3. Material Certification
Miami-Dade County Notice of Acceptance
Eastman Chemical Company
Saflex PVB Interlayer

Installation:

Refer to Installation Instructions (**DOM006**) for anchor spacing and more details of the installation requirements.

Design Pressure:

Refer to Installation Instructions (**DOM006**) for design pressures based on size and configuration.