Force Engineering & Testing
19530 Ramblewood Drive
Humble, Texas 77338
Office: (281) 540-6603 Test Lab: (832) 720-4251
www.forceengineeringtesting.com

Product Evaluation Report

WHIRLWIND STEEL BUILDINGS, INC.

26 Ga. Super Span X Reverse Rolled Wall Panel over open framing

Florida Product Approval # FL 47845.2

Florida Building Code 2026
Per Rule 61G20-3
Method: 2 –B

Category: Structural Components
Subcategory: Structural Wall
Compliance Method: 61G20-3.005(2)(B)
NON HVHZ

Product Manufacturer:
Whirlwind Steel Buildings, Inc.
8234 Hansen Road
Houston, TX 77075

Engineer Evaluator:
Johnathan Green, P.E. #88223
Florida Evaluation ANE ID: 12901

Contents:

Evaluation Report: Page 1 - 3
Installation Detail: Page 4

JOHNATHAN GREEN
LICENSE
No. 88223
STATE OF
FLORIDA
PROFESSIONAL ENGINEER

September 20, 2026

THIS DOCUMENT HAS BEEN DIGITALLY SIGNED AND SEALED BY JOHNATHAN GREEN ON THE DATE ADJACENT TO THE SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

Force Engineering & Testing
19530 Ramblewood Drive
Humble, Texas 77338
Office: (281) 540-6603 Test Lab: (832) 720-4251
www.forceengineeringtesting.com

Compliance Statement:	The product as described in this report has demonstrated compliance with the Florida Building Code 2026, Sections 1709.2.
Product Description:	26 Ga. Super Span X Reverse Rolled Wall Panel, 26 Ga. Steel, 36" Wide, through fastened structural wall panel. Structural Application.
Panel Material/Standards:	Material: 26 Ga. Steel, panel material shall comply with Florida Building Code 2026 Section 1405.2. Yield Strength: Min. 80.0 ksi
Panel Dimension(s):	Thickness: 0.0185" min. Width: 36" maximum coverage Rib Height: 1-1/4" Tall Ribs at 12" O.C.
Panel Fastener:	#12-14 x 1-1/4" HWH SD with sealing washer or approved equal at 12"-12"-12" fastener pattern. Panel side laps fastened together w/ ¼-14 x 7/8" HWH SD w/ sealing washer at 20" O.C. Corrosion Resistance: Per Florida Building Code 2026 and Section 1711 for installations within 3000 ft. of a saltwater coastline.
Substrate Description:	Min. 16 Ga. Steel Framing. Framing must be designed in accordance w/ Florida Building Code 2026.

Allowable Design Pressures:

Table "A"

Maximum Allowable Design Pressure:	-26.0 psf	-78.1 psf	+26.0 psf	+130.1 psf
Fastener Pattern:	12"-12"-12"	12"-12"-12"	12"-12"-12"	12"-12"-12"
Fastener Spacing:	5'-0" O.C.	2'-0" O.C.	5'-0" O.C.	2'-0" O.C.

*Design Pressure includes a Safety Factor = 2.0.

.

Force Engineering & Testing
19530 Ramblewood Drive
Humble, Texas 77338
Office: (281) 540-6603 Test Lab: (832) 720-4251
www.forceengineeringtesting.com

Code Compliance:	The product described herein has demonstrated compliance with The Florida Building Code 2026, Section 1709.2.
Evaluation Report Scope:	The product evaluation is limited to compliance with the structural wind load requirements of the Florida Building Code 2026, as relates to Rule 61G20-3.
Performance Standards:	The product described herein has demonstrated compliance with: § ASTM E 330/E330M-14 Test method for structural performance of exterior windows, doors, skylights and curtain walls by uniform static air pressure difference.
Reference Data:	1. ASTM E 330/E330M-14 Farabaugh Engineering & Testing, Inc. Report No. T172-26. 2. Certificate of Independence By Johnathan Green, P.E. (No. 88223) @ Force Engineering & Testing (FBC Organization # ANE ID: 12901)
Quality Assurance Entity:	The manufacturer has established compliance of roof panel products in accordance with the Florida Building Code and Rule 61G20-3.005 (3) for manufacturing under a quality assurance program audited by an approved quality assurance entity.
Installation:	Install per manufacturer's recommended details.
Insulation:	Manufacturer's approved product (Optional)
Roof Panel Fire Classification:	Fire classification is not part of this acceptance.
Shear Diaphragm:	Shear diaphragm values are outside the scope of this report.
Design Procedure:	Based on the dimensions of the structure, appropriate wind loads are determined using Chapter 16 of the Florida Building Code 2026 for wall cladding wind loads. These component wind loads for wall cladding are compared to the allowable pressure listed above. The design professional shall select the appropriate erection details to reference in his drawings for proper fastener attachment to his structure and analyze the panel fasteners for pullout and pullover. Support framing must be in compliance with Florida Building Code 2026 Chapter 22 for steel, and Chapter 16 for structural loading.

Force Engineering & Testing
19530 Ramblewood Drive
Humble, Texas 77338
Office: (281) 540-6603 Test Lab: (832) 720-4251
www.forceengineeringtesting.com

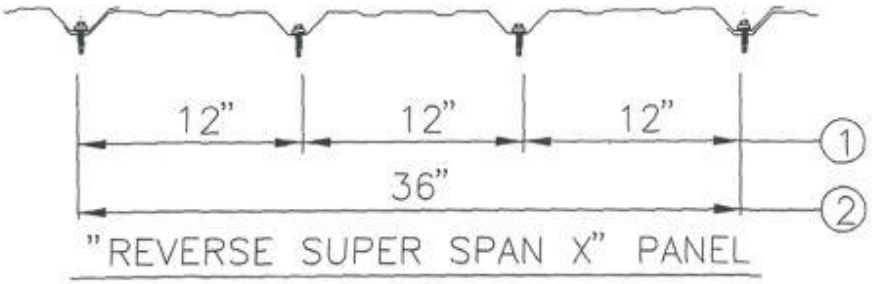

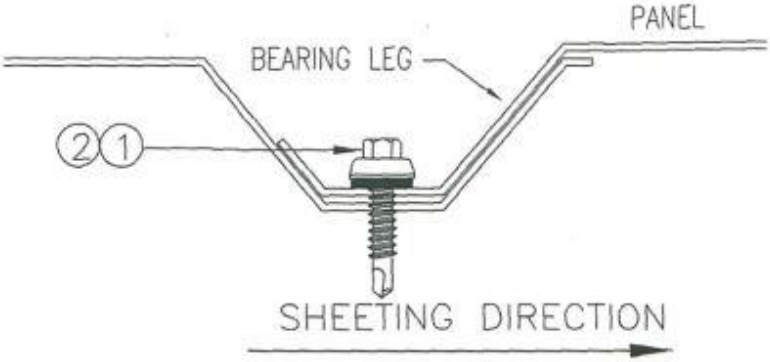

MEMBER SCREWS

(1) = AT SUPPORTS

#12 - 14 x 1" LG. HEX HEAD, TEK 3 W/SEALING WASHER

STITCH SCREWS

(2) = 20" O.C. PANEL SIDE LAPS

#14 x 7/8" LG. HEX HEAD, TEK 3, W/SEALING WASHER