



1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

Product Evaluation Report

of
ODL, Inc.

**Severe Weather Doorglass – Keystone Lite Kit
(HVHZ) (Impact)**

for
Florida Product Approval

FL# FL47849

Report No. 10206

Current Florida Building Code

Method: 1 – D (Engineering Evaluation)

Category: Exterior Doors

Sub – Category: Exterior Door Components

**Product: Severe Weather Doorglass – Keystone
Lite Kit**

Materials: Rigid PVC

Product Dimensions: See Installation Instructions, ODL015

Prepared for:

ODL, Inc.

**215 East Roosevelt Ave.
Zeeland, Michigan, 49464**


Prepared by:

Hermes F. Norero, P.E.

Florida Professional Engineer # 73778

Date: 10/15/2025

Contents:
Evaluation Report Pages 1 – 3

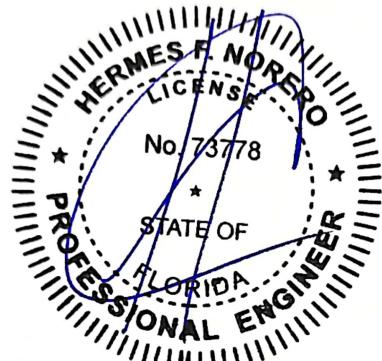



FL#: **FL47849**
Date: 10/15/2025
Report No: 10206

1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

Manufacturer: **ODL, Inc.**

Product Category: Exterior Doors

Product Sub-Category: Exterior Door Components

Compliance Method: State Product Approval Method (1)(d)

Product Name: **Severe Weather Doorglass – Keystone Lite Kit
(HVHZ) (Impact)**

Scope: This is a Product Evaluation Report issued by Hermes F. Norero, P.E. (FL # 73778) for **ODL, Inc.** based on Method 1d of the State of Florida Product Approval, Department of Business and Professional Regulation - Florida Building Commission.

Hermes F. Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the current Florida Building Code.

See Installation Instructions **ODL015**, signed and sealed by Hermes F. Norero, P.E. (FL # 73778) for specific use parameters.

Limits of Use:

1. This product has been evaluated and is in compliance with the current Florida Building Code, including the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with Chapter 16 of the current Florida Building Code and does not require an impact resistant covering.
4. Site conditions that deviate from the details of installation instructions **ODL015** require further engineering analysis by a licensed engineer or registered architect.
5. See Installation Instructions **ODL015** for size and design pressure limitations.

954.399.8478

954.744.4738



BUILDINGDROPS.COM



CONTACT@BUILDINGDROPS.COM



FL#: FL47849

Date: 10/15/2025

Report No: 10206

1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

Quality Assurance:

The manufacturer has demonstrated compliance of manufacture of products in accordance with the current Florida Building Code for manufacturing under a quality assurance program audited by an approved quality assurance entity through **National Accreditation & Management Institute** (FBC Organization #QUA1789)

Performance Standards:

The product described herein has been evaluated per:

- TAS 201-94
- TAS 202-94
- TAS 203-94
- ASTM E1886-19
- ASTM E1996-20

Referenced Data:

1. Product Testing performed by **IFET, Inc.**
(FBC Organization #TST14775)
Report #: TR-IFET-25-0078 Report Date: 10/10/2025
TAS reports signed and sealed by Arshad Viqar, FL P.E. No. 38863
2. Quality Assurance
National Accreditation & Management Institute
(FBC Organization #QUA1789)
3. Material Certification
Miami-Dade County Notice of Acceptance
Eastman Chemical Company
Saflex PVB Interlayer
4. Material Certification
Miami-Dade County Notice of Acceptance
Rehau Construction
23-1013.12

Installation:

Refer to Installation Instructions (**ODL015**) for anchor spacing and more details of the installation requirements.

Design Pressure:

Refer to Installation Instructions (**ODL015**) for design pressures based on size, configuration, and glass types.

954.399.8478

954.744.4738

BUILDINGDROPS.COM

CONTACT@BUILDINGDROPS.COM