



1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

Product Evaluation Report

of

**Voss Solid USA
Lynx Aluminum Siding
(HVHZ)**

for

Florida Product Approval

FL# FL47912

Report No. 10264

Current Florida Building Code

Method:	1 – D (Engineering Evaluation)
Category:	Panel Walls
Sub – Category:	Siding
Product:	Lynx Aluminum Siding
Materials:	Aluminum (Min. 6063-T5)
Product Dimensions:	See Installation Instructions, VSU001

Prepared for:

**Voss Solid USA
4035 Cheyenne Ct
Chino, California 91710**


Prepared by:

Hermes F. Norero, P.E.
Florida Professional Engineer # 73778
Date: 11/05/2025

Contents:

Evaluation Report Pages 1 – 3

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2025.11.25 11:22:28 -05'00'

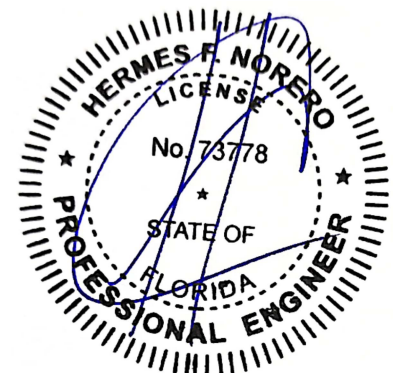

Hermes F. Norero, P.E.
Florida No. 73778

Manufacturer: Voss Solid USA

Product Category: Panel Walls

Product Sub-Category: Siding

Compliance Method: State Product Approval Method (1)(d)

Product Name: Lynx Aluminum Siding
(HVBZ)

Scope: This is a Product Evaluation Report issued by Hermes F. Norero, P.E. (FL # 73778) for **Voss Solid USA** based on Method 1d of the State of Florida Product Approval, Department of Business and Professional Regulation - Florida Building Commission.

Hermes F. Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the current Florida Building Code.

See Installation Instructions **VSU001**, signed and sealed by Hermes F. Norero, P.E. (FL # 73778) for specific use parameters.

Limits of Use:

1. This product has been evaluated and is in compliance with the current Florida Building Code, **including** the "High Velocity Hurricane Zone" (HVBZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. Site conditions that deviate from the details of installation instructions **VSU001** require further engineering analysis by a licensed engineer or registered architect.
4. See Installation Instructions **VSU001** for size and design pressure limitations.

Quality Assurance: The manufacturer has demonstrated compliance of manufacture of products in accordance with the current Florida Building Code for manufacturing under a quality assurance program audited by an approved quality assurance entity through **National Accreditation and Management Institute**.
(FBC Organization # QUA1789)

Performance Standards: The product described herein has been tested per:

- TAS 202-94
- TAS 203-94

Referenced Data:

1. Product Testing performed by **PRI Construction Materials Technologies, LLC** (FBC Organization # TST5878)
Report #: 2878T0001, Report Date: 11/05/2025
TAS Report Signed and Sealed by Zachary R. Priest, FL PE No. 74021

Installation:

Refer to Installation Instructions (**VSU001**) for anchor spacing and more details of the installation requirements.

Design Pressure:

Refer to Installation Instructions (**VSU001**) for design pressures based on size, configuration, and glass types.