

WOLTERS ENGINEERING

ENGINEERING, DRAFTING, CONSULTING

15211 97th Road N
West Palm Beach, FL 33412
Ph/Fx: (561) 225-1982

PRODUCT EVALUATION

PRODUCT: KAWNEER 1600 WALL SYSTEM 1 - 2 1/2" x 7 13/16" CURTAINWALL SYSTEM
LEVEL E IMPACT RESISTANT

MANUFACTURER: KAWNEER, INC.
5555 WINDWARD PARKWAY, SUITE 220
ALPHARETTA, GA 30004

To all concerned,

The Kawneer 1600 Wall System 1, 2 1/2" x 7 13/16" Level E Large and Small Missile Impact Resistant Curtainwall System has been tested per TAS 201 (1994), 202 (1994), 203 (1994), ASTM E1886-13a, and E1996-17 by Intertek B&C, with results shown in the test reports I7021.01-550-18, I7021.02-550-18, and I7021.03-550-18.

I have reviewed the test standards listed above and have determined that for this product, they are equivalent to AAMA 501-25 as referenced in the Florida Building Code.

Technical Documentation:

1. Drawing "1600-IR-OH", dated 10/18/26 (Rev. 1), signed and sealed by Scott Wolters, PE.
2. Test Reports listed above by Intertek B&C, signed and sealed by Vinu J. Abraham, PE.
3. Supplemental Calculations to support "1600-IR-OH", signed and sealed by Scott Wolters, PE.

I have reviewed this submittal per the requirements of FAC Product Approval Rule Chapter 61G20-3.005 (4). Based on the limitations listed below and those provided in the documents above, this product meets all the requirements of the 9th Edition (2026) Florida Building Code generally, and chapters 16, 17, 20, and 24 specifically, including the HVHZ provisions.

Limitations: This system has been tested and approved for use inside and outside the HVHZ. It is Level E large and small missile impact resistant, and shutters are not required.

Maximum Design Pressures: Varies - See Mullion Chart on Sheet 5 of 1600-IR-OH.
Glass Chart on Sheet 6 of 1600-IR-OH.
Anchor Charts on Sheets 7-9 of 1600-IR-OH.

The lowest pressure applies to the entire system.

Glass: Design pressures for each glass type are based on the testing listed above and ASTM E1300-16. See Sheet 6 of 1600-IR-OH.

Glass Type 1: 1 5/16" Insulated Laminated
1/4" Tempered
1/2" Air Space (Alum Spacer)
3/16" Heat Strengthened
0.180" Sentryglas Interlayer*
3/16" Heat Strengthened


* The Sentryglas Interlayer is manufactured by Kuraray America Inc, per NOA# 26-0625.02.


Mullions and Reinforcing: Please see the Mullion Chart on Sheet 5 of 1600-IR-OH for allowable mullion heights, spacing, and pressures for mullions with and without reinforcing.

Anchors: Please see the Anchor Charts and Details on Sheets 7-8 of 1600-IR-OH for the allowable anchors and loads at the head and sill, and on Sheet 9 for the allowable anchors and loads at jambs anchored with F-Perimeter.

If you have any questions or need more information concerning this approval please contact me.

Thank you,


Scott Wolters
FL PE# 62354
OCT 18 2026

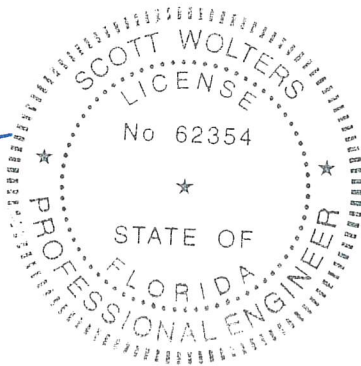

Digitally signed
by Scott Wolters
Date: 2026.10.18
23:09:23 -04'00'