BUILDING DROPS
1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

# Product Evaluation Report

***of***

**YKK AP America Residential**
**StyleGuard Double Hung Window**
**(HVHZ) (Impact)**

***for***

**Florida Product Approval**

## FL# FL7533

## Report No. 11598

**Current Florida Building Code**

| | |
|---|---|
| **Method:** | **1 – A (Certification)** |
| **Category:** | **Windows** |
| **Sub – Category:** | **Double Hung** |
| **Product:** | **StyleGuard Double Hung Window** |
| **Materials:** | **PVC** |
| **Product Dimensions:** | **See Installation Instructions, YKK139** |

**Prepared for:**
YKK AP America Residential
101 Marietta Street NW, Suite 2100
Atlanta, GA 30303

**Prepared by:**
Hermes F. Norero, P.E.
Florida Professional Engineer # 73778
Date: 8/3/2026

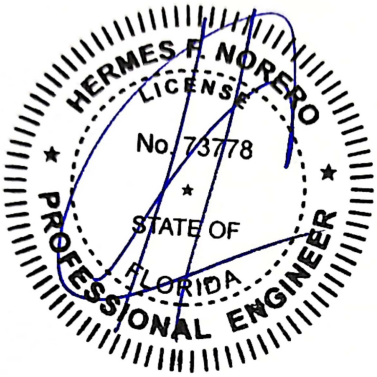


Contents:

Evaluation Report Pages 1 – 3

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2026.09.08 18:28:57 -04'00'

Hermes F. Norero, P.E.
Florida P.E. No. 73778

1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

**Manufacturer:** **YKK AP America Residential**

**Product Category:** Windows

**Product Sub-Category:** Double Hung

**Compliance Method:** State Product Approval Method (1)(a)

**Product Name:** **StyleGuard Double Hung Window (HVHZ) (Impact)**

**Scope:** This is a Product Evaluation Report issued by Hermes F. Norero, P.E. (FL # 73778) for **YKK AP America Residential** based on Method 1a of the State of Florida Product Approval, Department of Business and Professional Regulation - Florida Building Commission.

Hermes F. Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the current Florida Building Code.

See Installation Instructions **YKK139**, signed and sealed by Hermes F. Norero, P.E. (FL # 73778) for specific use parameters.

**Limits of Use:**

1. This product has been evaluated and is in compliance with the current Florida Building Code, **including** the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with Chapter 16 of the current Florida Building Code and **does not require** an impact resistant covering.
4. Site conditions that deviate from the details of installation instructions **YKK139** require further engineering analysis by a licensed engineer or registered architect.
5. See Installation Instructions **YKK139** for size and design pressure limitations.



954.399.8478 954.744.4738
BUILDINGDROPS.COM CONTACT@BUILDINGDROPS.COM

1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

**Certification Agency:** The manufacturer has demonstrated compliance of manufacture of products in accordance with the Florida Building Code for manufacturing under an approved certification agency through **National Accreditation & Management Institute, Inc.** (FBC Organization # CER1773).

**Performance Standards:** The product described herein has been evaluated per:

- ASTM E283-19
- ASTM E330-14
- ASTM E331-00(23)
- TAS 201-94
- TAS 202-94
- TAS 203-94

**Referenced Data:**

1. Product Testing performed by **Hurricane Test Laboratory, LLC.**
   (FBC Organization # TST1527)
   Report #: 0231-1107-05 Report Date: 06/14/06
   Report #: G231-0110-08 Report Date: 04/04/08
   Reports Signed by Vinu J. Abraham FL P.E. No. 53820

2. Material Certification
   **Miami-Dade County Notice of Acceptance**
   Saflex PVB Interlayer for Eastman Chemical Co.

3. Material Testing by **ETC Laboratories, ETC-05-662-17004.0.**
   For PVC Material, (ASTM D2843, ASTM D635, ASTM D1929, ASTM D638)

4. Certified Profile License by **AAMA**
   AAMA 303 Fenestration Exterior Profile Certification Program
   (For PVC Lineal Material)
   YKK AP America, Inc. – YKK-1

**Installation:**

Refer to Installation Instructions (**YKK139**) for anchor types, spacing, and more details of the installation requirements.

**Design Pressure:**

Refer to Installation Instructions (**YKK139**) for design pressure configurations.



954.399.8478 954.744.4738
BUILDINGDROPS.COM CONTACT@BUILDINGDROPS.COM