


Weather Shield


THIS SCHEDULE SHOWS ONLY THE ADDITIONAL FASTENERS REQUIRED TO ANCHOR THE MULLION. EACH INDIVIDUAL WINDOW OR DOOR REQUIRES ANCHORAGE ACCORDING TO THE SCHEDULE FOR THAT PRODUCT AND ALLOWABLE ANCHORAGE METHOD.

Windows & Doors 8617 CONTEMPORARY DOOR VERTICAL MULLION INSTALLATION

MULLION SECTION AT A-A
2" LVL REINFORCEMENT
SHOWN
OTHER REINFORCEMENT
AVAILABLE.

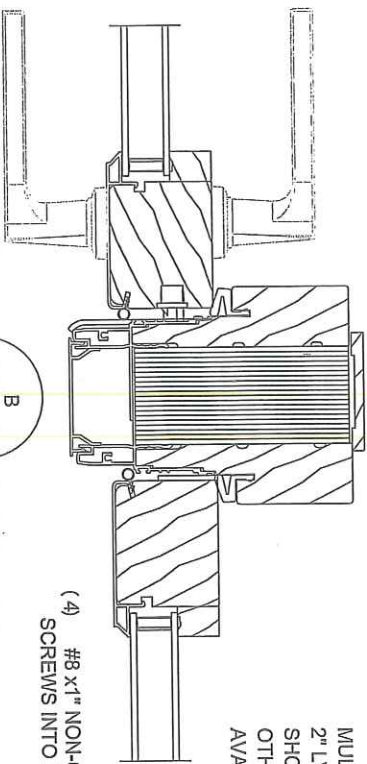


(4) #8 x 1" NON-CORROSIVE
SCREWS INTO END OF LVL
MULLION

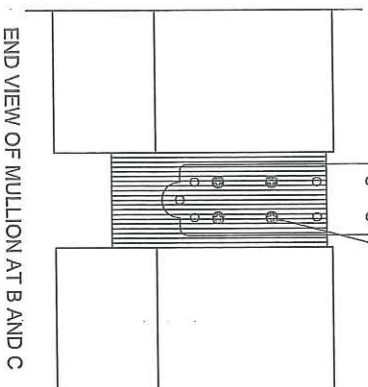


END VIEW OF MULLION AT B AND C

WOOD FRAMING
BY OTHERS
(2) #6 x 1 5/8" NON-CORROSIVE SCREWS
THROUGH EACH
INSTALLATION CLIP
INTO FRAMING
5/8" EDGE DISTANCE TYP.

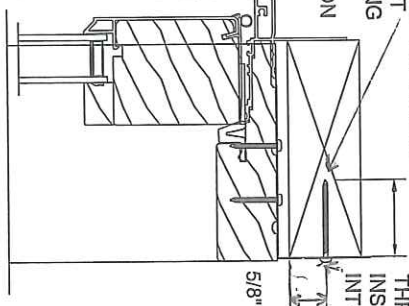

VERTICAL SECTION
AT HEAD

1 1/2" MINIMUM
EMBEDMENT
VERTICAL SECTION
AT SILL

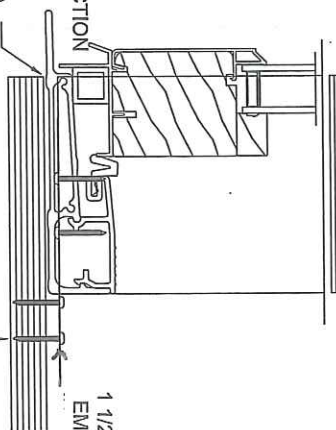

SILL SET INTO A
CONTINUOUS BED OF
SILICONE SEALANT
(4) #8 x 1" NON-CORROSIVE
SCREWS THROUGH INSTALLATION
CLIP INTO FLOOR

THIS SCHEDULE ADDRESSES ONLY THE FASTENERS REQUIRED TO ANCHOR THE MULLION (S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.

TOLERANCES UNLESS SPECIFIED	
INCHES	MILLIMETERS
xx ± 1"	xx ± 25 (0/25)
xxx ± 1/8"	xxx ± 3 (0/3)
xxxx ± 1/16"	xxxx ± 1.5 (0/1.5)

Weather Shield Windows & Doors

PRODUCTS:
8617 CONTEMPORARY OUTSWING DOOR

DRAWN BY: JVG	DATE: 8-25-2016	TITLE: VERTICAL MULLION ANCHORAGE	REV:
PROPERTY OF WEATHER SHIELD LLC, INC. ALL RIGHTS RESERVED. WEATHER SHIELD LLC, INC. SUBMITTED FOR USE OUTSIDE OF WEATHER SHIELD LLC, INC.	JVG NLS [D-01]	SCALE: 1/4"	SHEET NAME: Sheet1 SHEET 1 OF 1