


INSERT UNIT INSTALLATION DETAILS

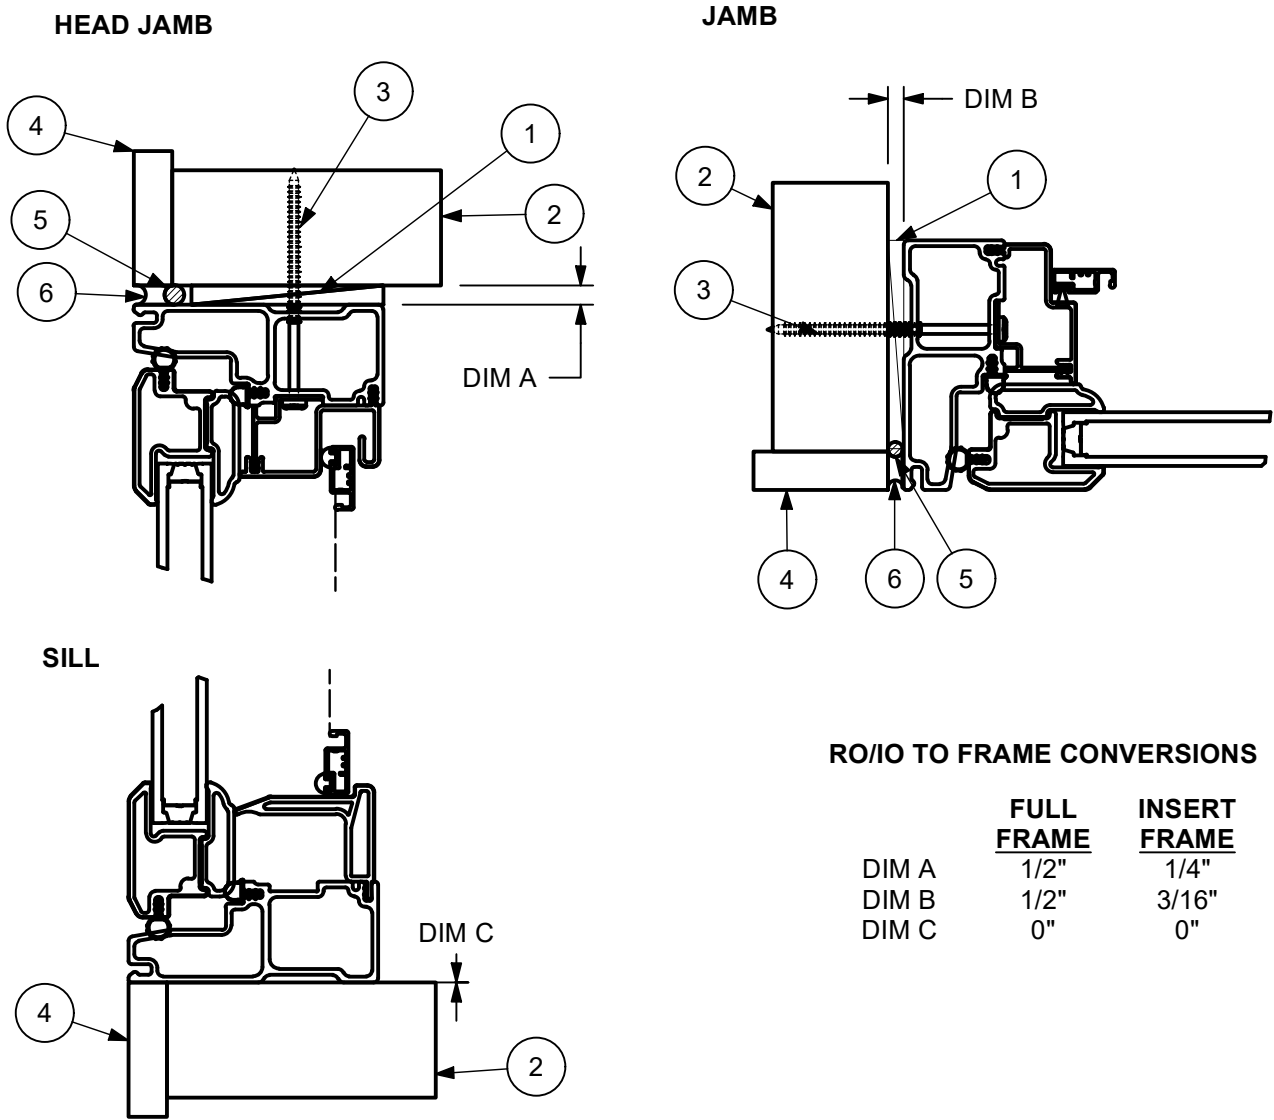

RO/IO TO FRAME CONVERSIONS

	FULL FRAME	INSERT FRAME
DIM A	1/2"	1/4"
DIM B	1/2"	3/16"
DIM C	0"	0"



NOTES:

- FOR GENERAL SPECIFICATIONS, REFER TO DOC 00003952
- THIS PRINT IS FOR STRUCTURAL PERFORMANCE ONLY. FOR FLASHING & SEALING INSTRUCTIONS, REFER TO THE INSTALLATION INSTRUCTIONS
- IF CHEMICALLY TREATED LUMBER IS USED FOR FRAMING MATERIAL, FASTENERS MUST BE A MINIMUM OF 0.90 OZ/FT^2 ZINC HOT DIPPED GALVANIZED STEEL TYPE 304 OR 316
- FOR INSTALLATION ELEVATIONS, REFER TO DOC 00055017
- DUAL PANE SHOWN, TRI-PANE AVAILABLE
- GLASS COMPLIES WITH ASTM E1300
- SCREWS AND NAILS MUST HAVE FULL EMBEDMENT

CATEGORY:
CASEMENT,

UNIT TYPE:
NINCA, NINAW, NINCP/NINAP, NCA, NAWN,
NCAP/NAWNP

FULL FRAME INSTALLATION DETAILS

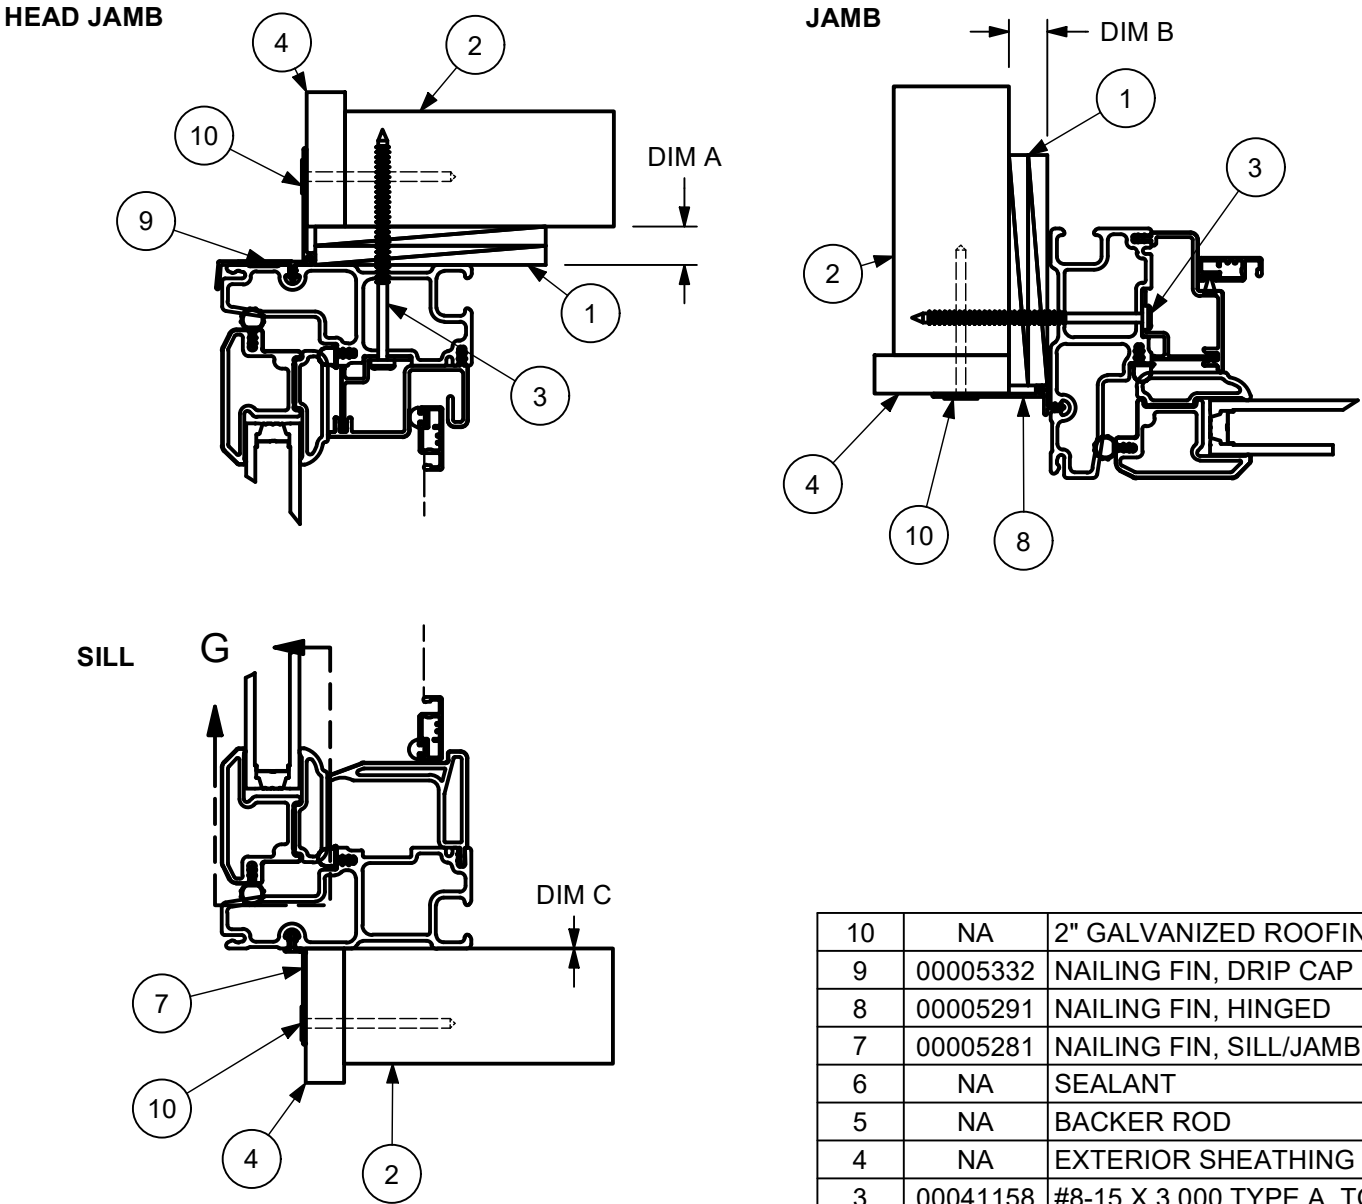

GLAZING DETAIL G
SCALE 1 : 2

10	NA	2" GALVANIZED ROOFING NAIL
9	00005332	NAILING FIN, DRIP CAP
8	00005291	NAILING FIN, HINGED
7	00005281	NAILING FIN, SILL/JAMB
6	NA	SEALANT
5	NA	BACKER ROD
4	NA	EXTERIOR SHEATHING
3	00041158	#8-15 X 3.000 TYPE A, TORX, PAN HEAD SCREW
2	NA	STANDARD FRAMING MATERIAL
1	NA	SHIMS

ITEM	DWG NO	DESCRIPTION
PARTS LIST		

MARVIN  **RESEARCH & DEVELOPMENT**

COLLECTION: INFINITY

DWG TYPE: INSTALLATION
DESCRIPTION: INSTALLATION METHODS

SHEET NAME: PRIMARY (1 OF 1)

CHK: AAA	SIZE: B	CLASS: SPEC DOC	DWG NO: 00055237	REV: 6
APP: JPE	SCALE: 1 : 2	DATE: 4/3/2008	DWG BY: LEMER, JORDAN	