

YKK AP AMERICA RESIDENTIAL


STYLEVIEW CLASSIC ORIEL, COTTAGE, & EQUAL SINGLE HUNG WINDOW (NON-HVHZ) (NON-IMPACT)

GENERAL NOTES:

- THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT EDITION FLORIDA BUILDING CODE (FBC), **EXCLUDING** HVHZ AND HAS BEEN EVALUATED ACCORDING TO THE FOLLOWING:
 - AAMA/WDMA/CSA 101/I.S.2/A440-11/17
- ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE/MASONRY, 2X FRAMING AND METAL STUD FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
- 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
- THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.
- APPROVED IMPACT PROTECTIVE SYSTEM **IS REQUIRED** ON THIS PRODUCT IN AREAS REQUIRING IMPACT RESISTANCE.
- WINDOW FRAME MATERIAL: PVC
- DESIGNATIONS "X" AND "O" STAND FOR THE FOLLOWING:
X: OPERABLE VENT
O: FIXED VENT
- GLAZING SHALL MEET ASTM E1300 REQUIREMENTS, SEE SHEET 1 FOR GLAZING DETAIL.

TABLE OF CONTENTS	
SHEET	SHEET DESCRIPTION
1	GENERAL NOTES & GLAZING DETAIL
2	ELEVATIONS & ANCHOR LAYOUTS
3	ELEVATIONS & ANCHOR LAYOUTS
4	ELEVATIONS & ANCHOR LAYOUTS
5	VERTICAL SECTIONS & REINFORCEMENT TABLE
6	HORIZONTAL SECTIONS
7	INSTALLATION NOTES, ANCHOR DETAILS, & ANCHOR SCHEDULE

DESIGN PRESSURE TABLE								
UNIT	MAX. FRAME SIZE		MAX. D.L.O.		DESIGN PRESSURE	CONFIGURATION	INSTALLATION METHOD	IMPACT RATING
	WIDTH	HEIGHT	WIDTH	HEIGHT				
1	39 1/2"	83 1/2"	33 11/32"	45 11/16"	+35/-35 PSF	"O/X" ORIEL	NAIL FIN	NOT RATED
2	43 1/2"	79 1/2"	37 11/32"	43 9/32"	+35/-35 PSF	"O/X" ORIEL	NAIL FIN	NOT RATED
3	39 1/2"	75 1/2"	33 11/32"	40 7/8"	+50/-50 PSF	"O/X" ORIEL	NAIL FIN	NOT RATED
4	39 1/2"	83 1/2"	33 11/32"	45 21/32"	+35/-35 PSF	"O/X" COTTAGE	NAIL FIN	NOT RATED
5	43 1/2"	79 1/2"	37 11/32"	43 1/32"	+35/-35 PSF	"O/X" COTTAGE	NAIL FIN	NOT RATED
6	39 1/2"	75 1/2"	33 11/32"	40 27/32"	+50/-50 PSF	"O/X" COTTAGE	NAIL FIN	NOT RATED
7	39 1/2"	83 1/2"	33 11/32"	38 1/4"	+35/-35 PSF	"O/X" EQUAL	NAIL FIN	NOT RATED
8	43 1/2"	79 1/2"	37 11/32"	36 1/4"	+35/-35 PSF	"O/X" EQUAL	NAIL FIN	NOT RATED
9	39 1/2"	75 1/2"	33 11/32"	34 1/4"	+50/-50 PSF	"O/X" EQUAL	NAIL FIN	NOT RATED

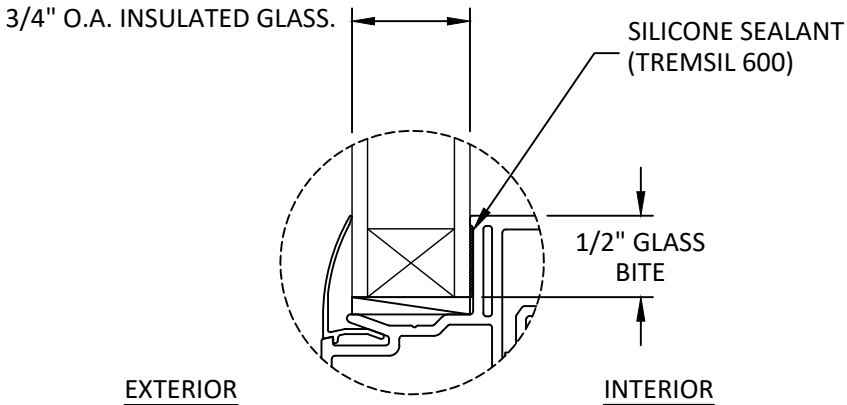

GLAZING DETAIL 1

GLAZING NOTES:

- GLASS TYPE SHALL COMPLY WITH ASTM E1300 REQUIREMENTS. TEMPER AND SAFETY GLAZING REQUIREMENTS SHALL BE REVIEWED ON A SITE SPECIFIC BASIS.
- SETTING BLOCK DUROMETER HARDNESS OF 70-90 (SHORE A) AS REFERENCED IN FBC CHAPTER 24.
- SETTING BLOCKS TO BE LOCATED AT 1/4 SPAN LENGTH FOR GLASS WIDER THAN 36" AS PER FBC CHAPTER 24.
- D.L.O. AND DESIGN PRESSURES MAY NOT EXCEED MAX VALUES SHOWN HEREIN.



YKK AP AMERICA RESIDENTIAL
101 MARIETTA STREET NW, SUITE 2100
ATLANTA, GA 30303
PH: (678) 838-6000

TITLE: STYLEVIEW CLASSIC ORIEL,
COTTAGE & EQUAL SINGLE
HUNG WINDOW
(NON-HVHZ) (NON-IMPACT)
GENERAL NOTES & GLAZING DETAIL


PREPARED BY:
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
REINFORCEMENT REV.	LS	05.27.26


THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2026.01.08 15:44:00 -0400

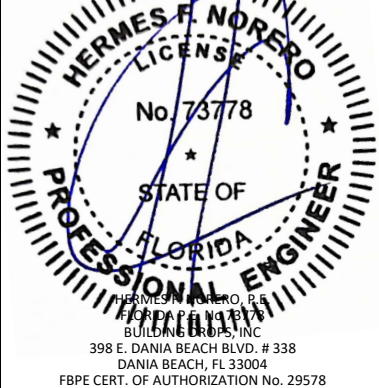


FL #:	FL8114
DATE:	01.08.2024
DWG. BY:	SH
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	YKK296
SHEET:	1


c:\users\lucianosanchez\building drops, inc\building drops, inc\projects\ykk ap america, inc\fbc-26-0534 - residential products - reinforcement revision\dwgs\single hung\ykk296.dwg
5/27/2026 10:42 AM

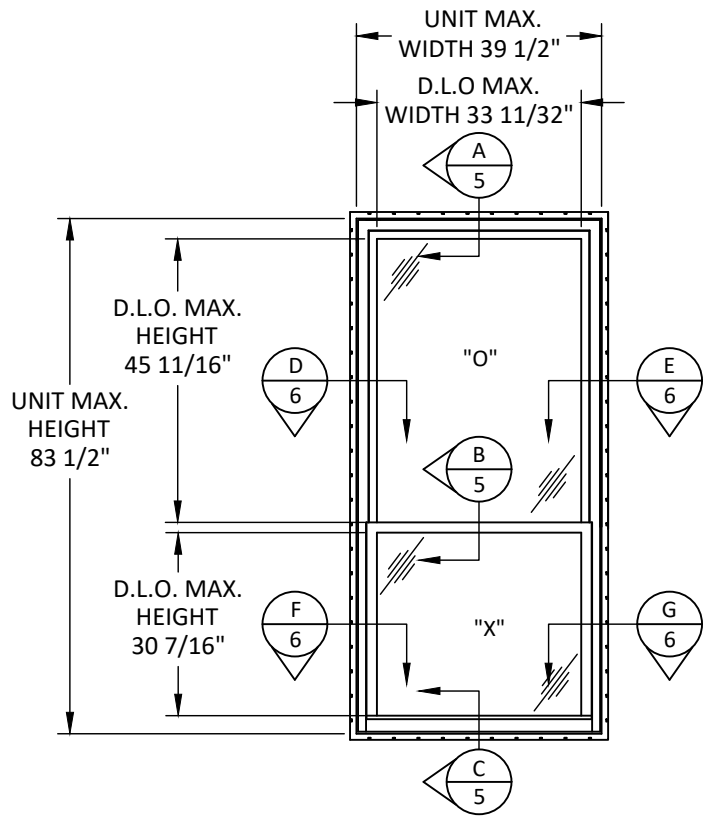


TYPICAL ELEVATION
SINGLE HUNG WINDOW (ORIEL)
DP35

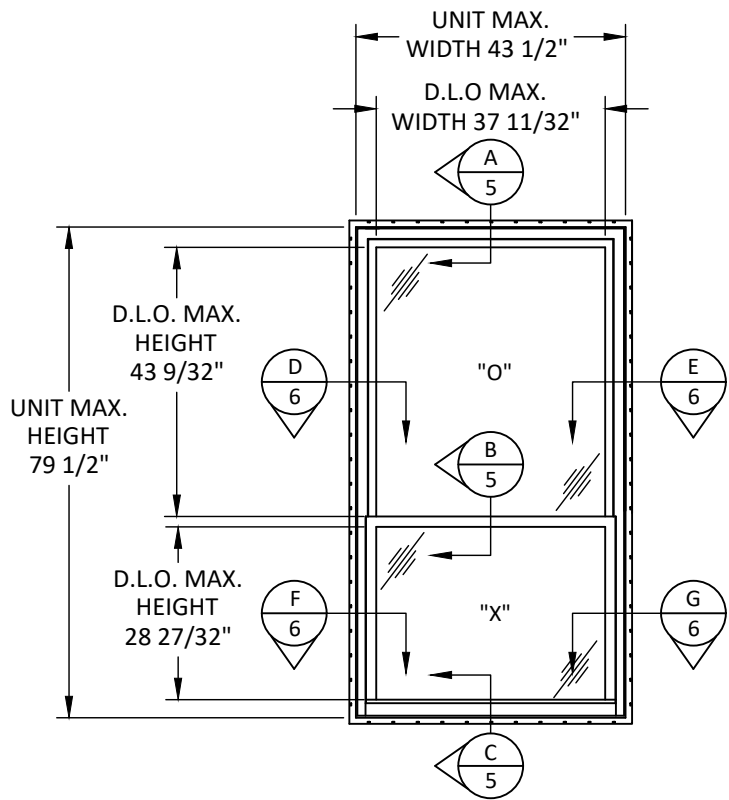


TYPICAL ELEVATION
SINGLE HUNG WINDOW (ORIEL)
DP35

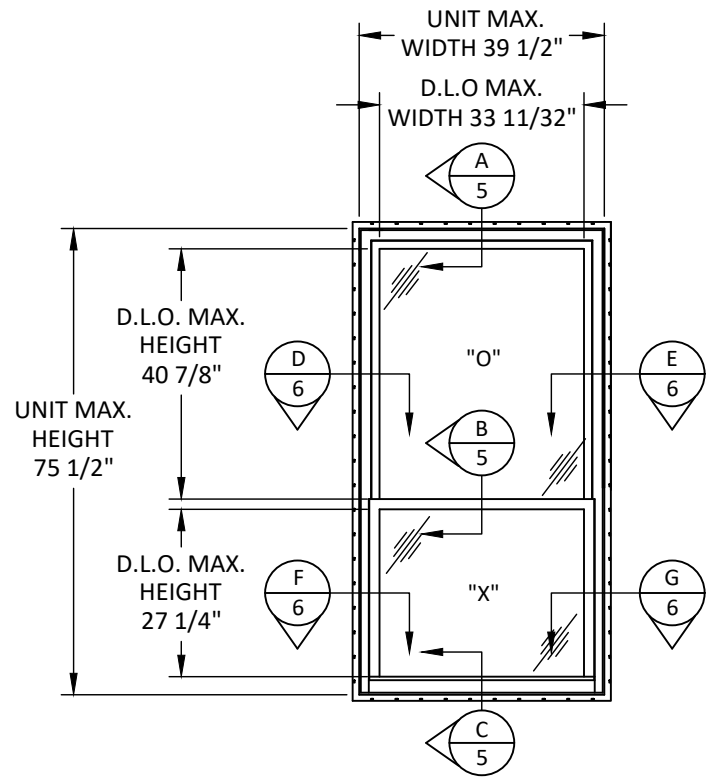


TYPICAL ELEVATION
SINGLE HUNG WINDOW (ORIEL)
DP50

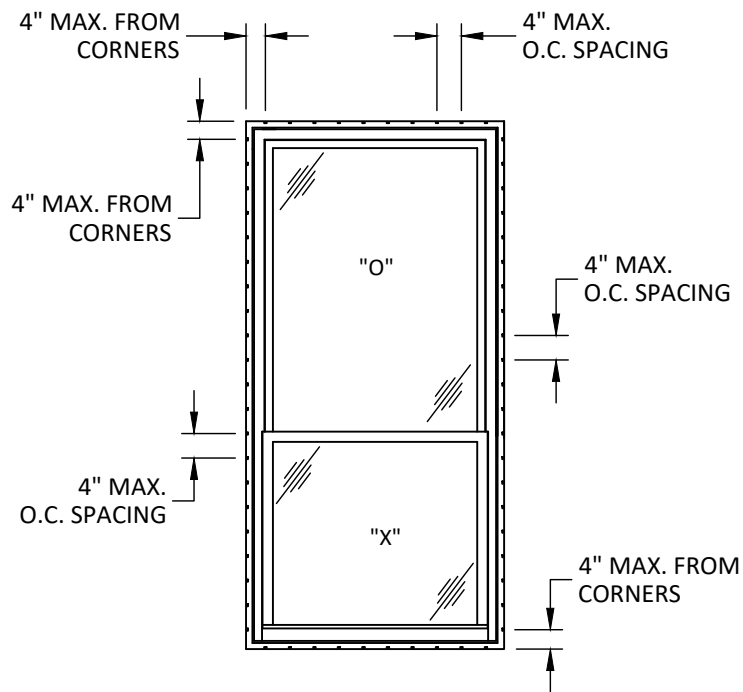

ANCHOR LAYOUT
NAILING FIN

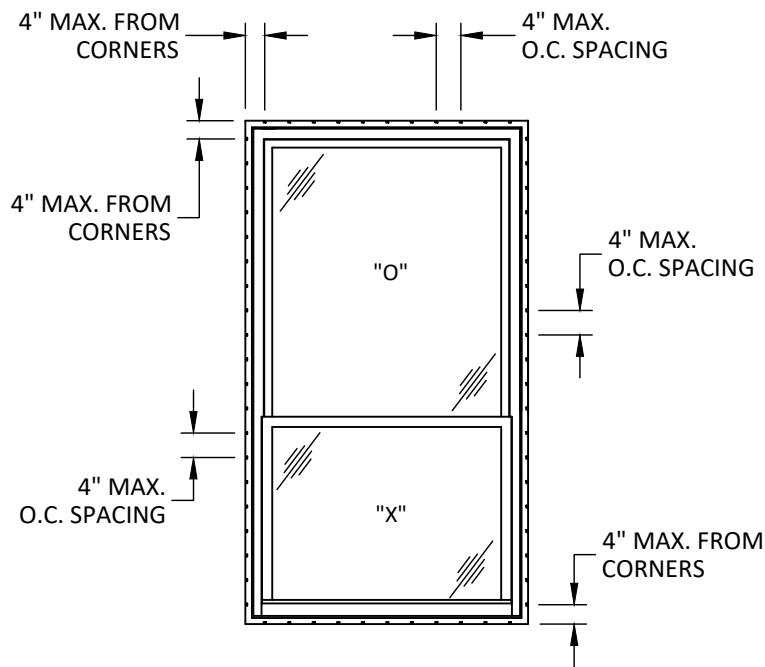

ANCHOR LAYOUT
NAILING FIN

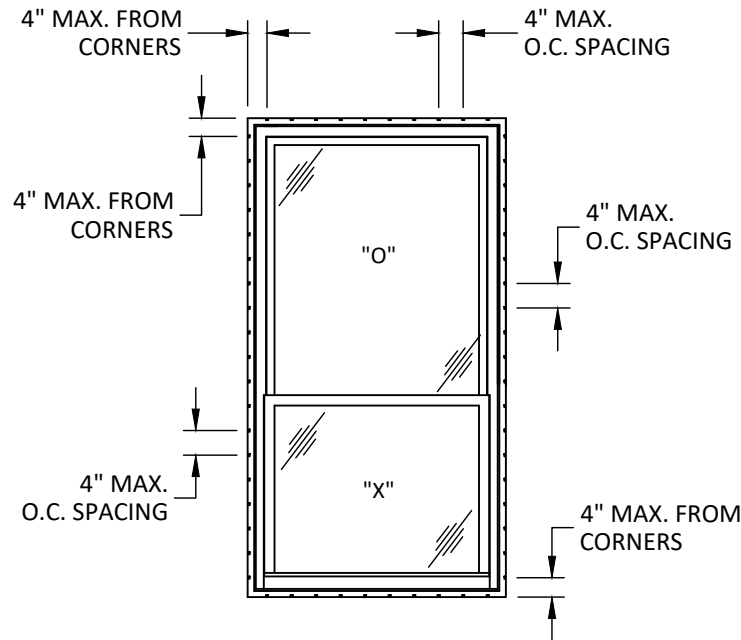

ANCHOR LAYOUT
NAILING FIN

YKK
ap Quality inspires™

YKK AP AMERICA RESIDENTIAL
101 MARIETTA STREET NW, SUITE 2100
ATLANTA, GA 30303
PH: (678) 838-6000

TITLE: STYLEVIEW CLASSIC ORIEL,
COTTAGE & EQUAL SINGLE
HUNG WINDOW
(NON-HVHZ) (NON-IMPACT)
ELEVATIONS & ANCHOR LAYOUTS

PREPARED BY: **BUILDING DROPS, INC.**
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com

B.D.
BUILDING DROPS


REMARKS	BY	DATE
REINFORCEMENT REV.	LS	05.27.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.


HERMES F. NORERO
LICENSE
No. 73778
STATE OF
FLORIDA
PROFESSIONAL ENGINEER
HERMES F. NORERO, P.E.
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD. # 338
DANIA BEACH, FL 33004
FBPE CERT. OF AUTHORIZATION No. 29578

FL #:	FL8114
DATE:	01.08.2024
DWG. BY:	SH
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	YKK296
SHEET:	2


c:\users\lucianosanchez\building drops, inc\building drops\landing - documents\common\projects\ykk ap america, inc\fbc-26-0534 - residential products - reinforcement revision\dwgs\single hung\ykk296.dwg
5/27/2026 10:42 AM

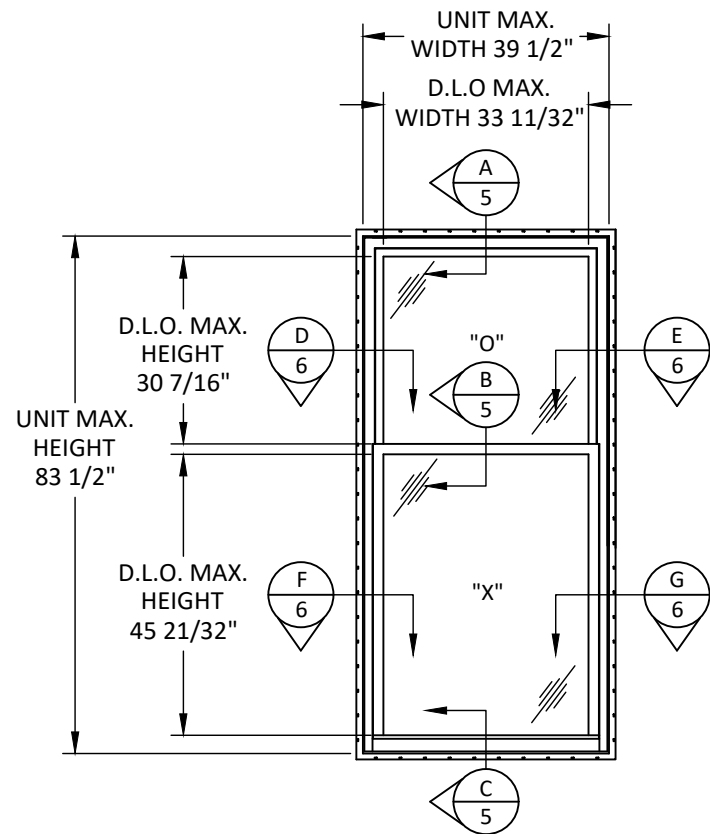


TYPICAL ELEVATION
SINGLE HUNG WINDOW (COTTAGE)
DP35

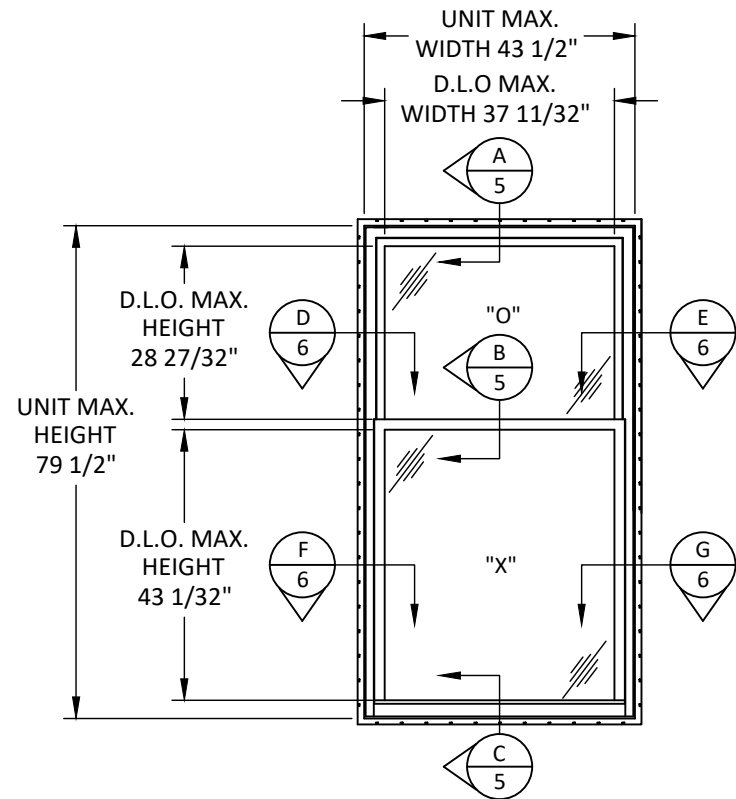


TYPICAL ELEVATION
SINGLE HUNG WINDOW (COTTAGE)
DP35

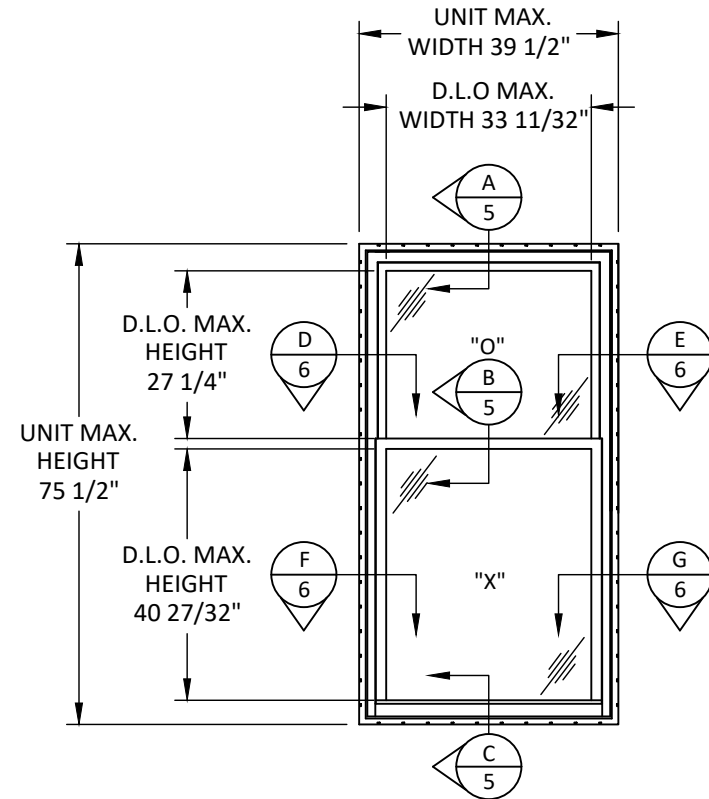


TYPICAL ELEVATION
SINGLE HUNG WINDOW (COTTAGE)
DP50

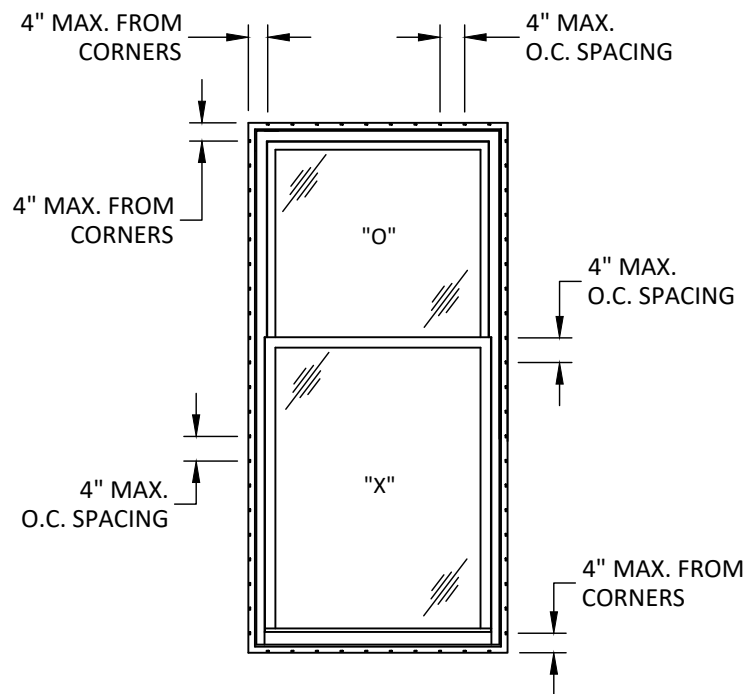

ANCHOR LAYOUT
NAILING FIN

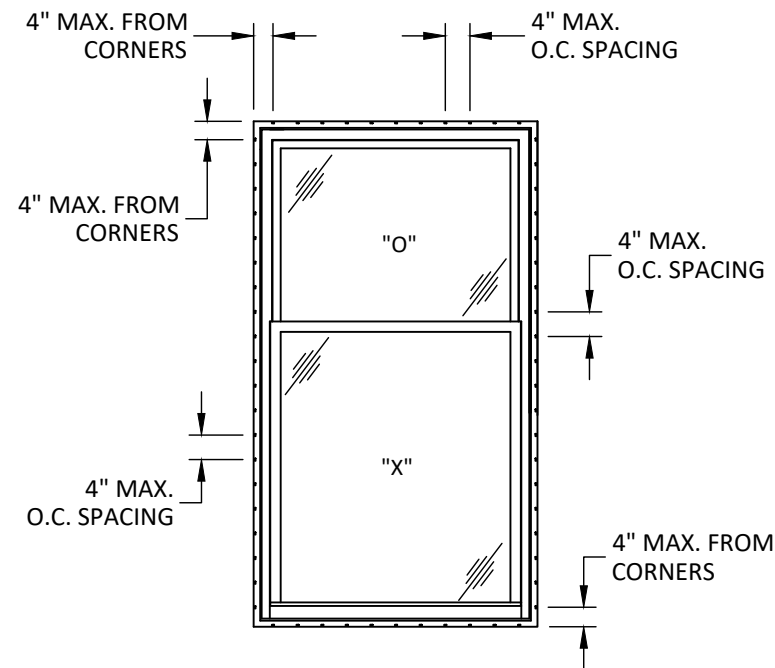

ANCHOR LAYOUT
NAILING FIN

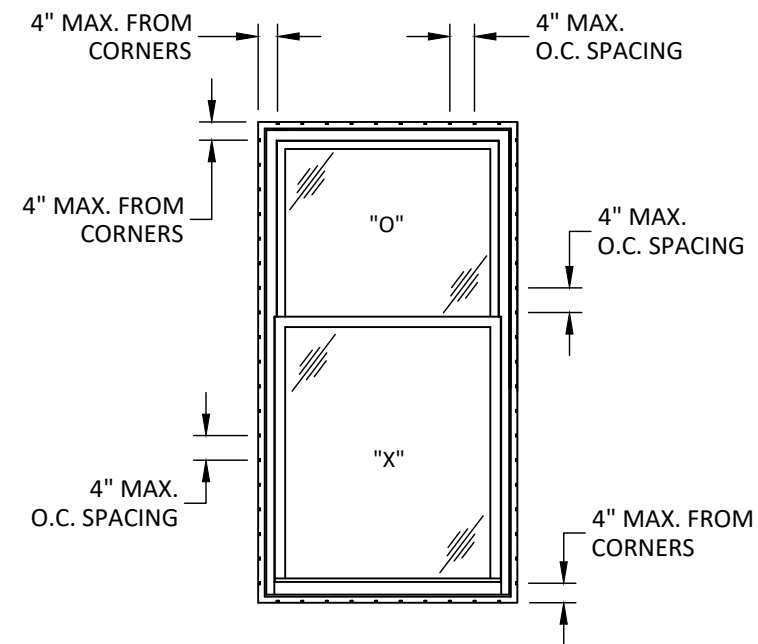

ANCHOR LAYOUT
NAILING FIN



YKK AP AMERICA RESIDENTIAL
101 MARIETTA STREET NW, SUITE 2100
ATLANTA, GA 30303
PH: (678) 838-6000


TITLE: STYLEVIEW CLASSIC ORIEL,
COTTAGE & EQUAL SINGLE
HUNG WINDOW
(NON-HVHZ) (NON-IMPACT)
ELEVATIONS & ANCHOR LAYOUTS

PREPARED BY:
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com




REMARKS	BY	DATE
REINFORCEMENT REV.	LS	05.27.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC
AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC
SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE
FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED
ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC
DOCUMENTS FOR USE WITH THIS DOCUMENT.

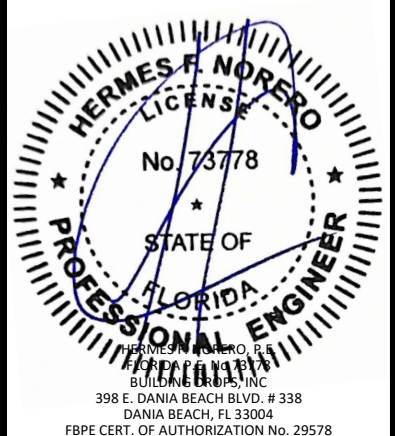


FL #:	FL8114
DATE:	01.08.2024
DWG. BY:	SH
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	YKK296
SHEET:	3


c:\users\lucianosanchez\building drops, inc\building drops\landing - documents\common\projects\ykk ap america, inc\fbc-26-0534 - residential products - reinforcement revision\dwgs\single hung\ykk296.dwg
5/27/2026 10:42 AM

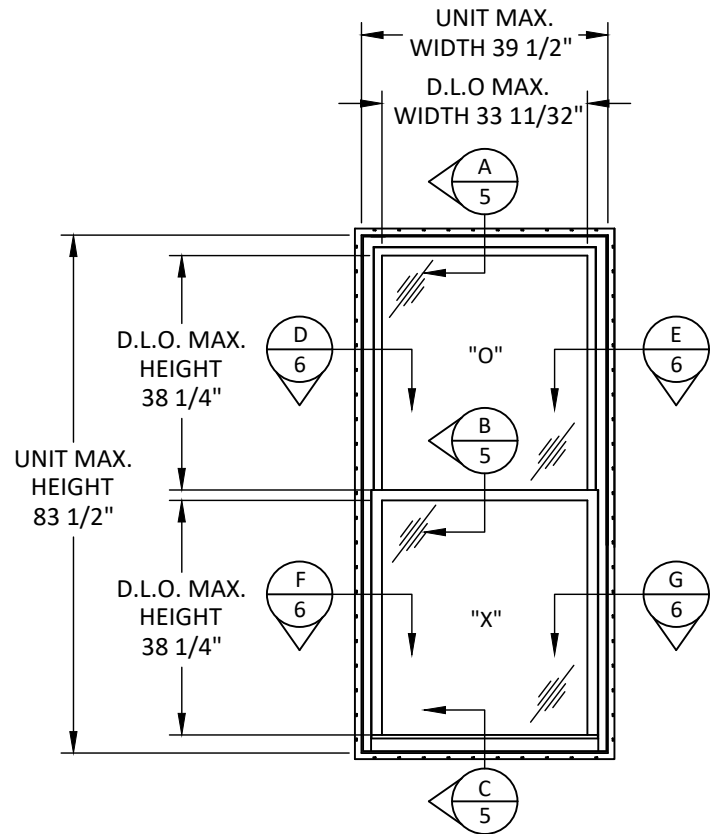


TYPICAL ELEVATION
SINGLE HUNG WINDOW (EQUAL)
DP35

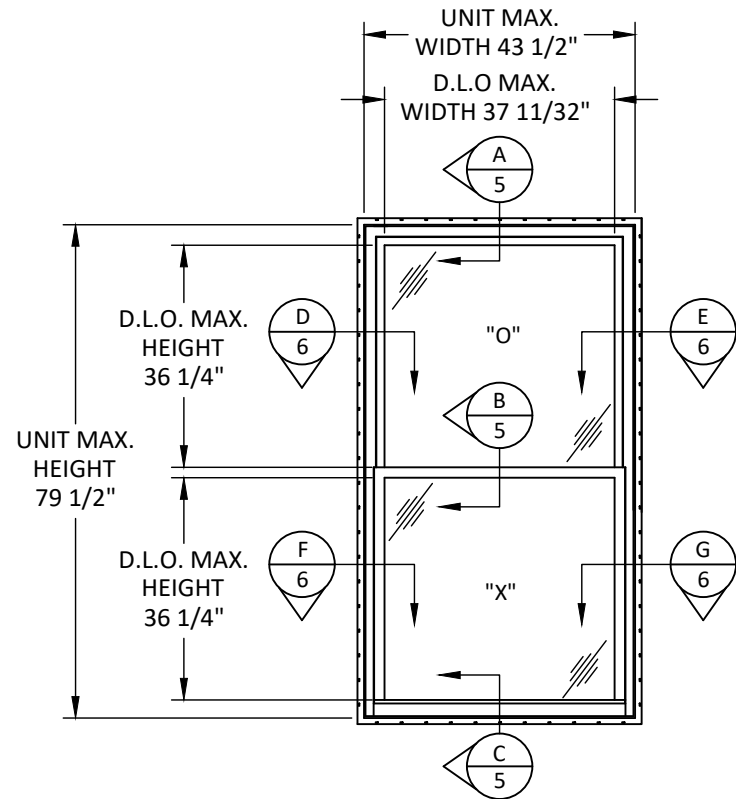


TYPICAL ELEVATION
SINGLE HUNG WINDOW (EQUAL)
DP35

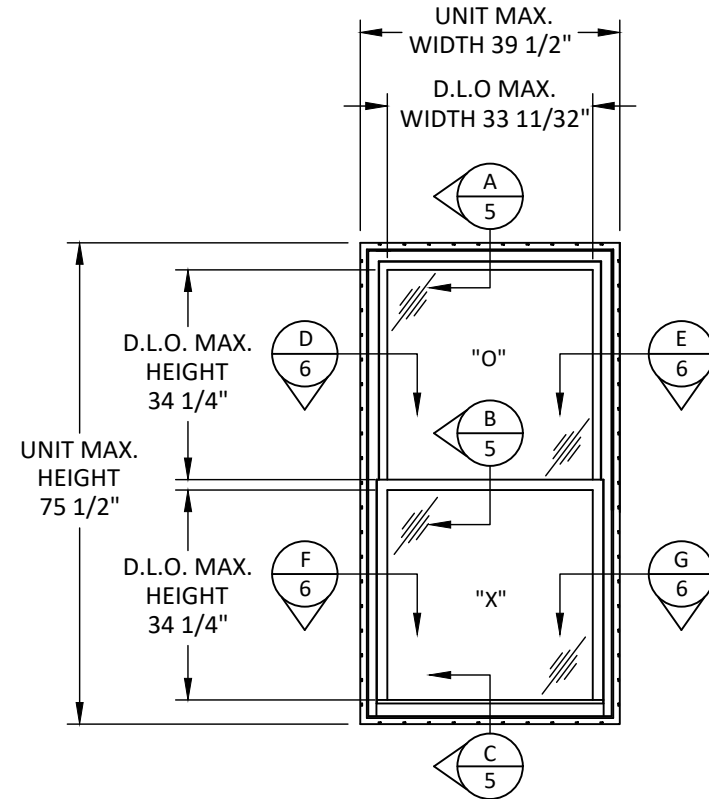


TYPICAL ELEVATION
SINGLE HUNG WINDOW (EQUAL)
DP50

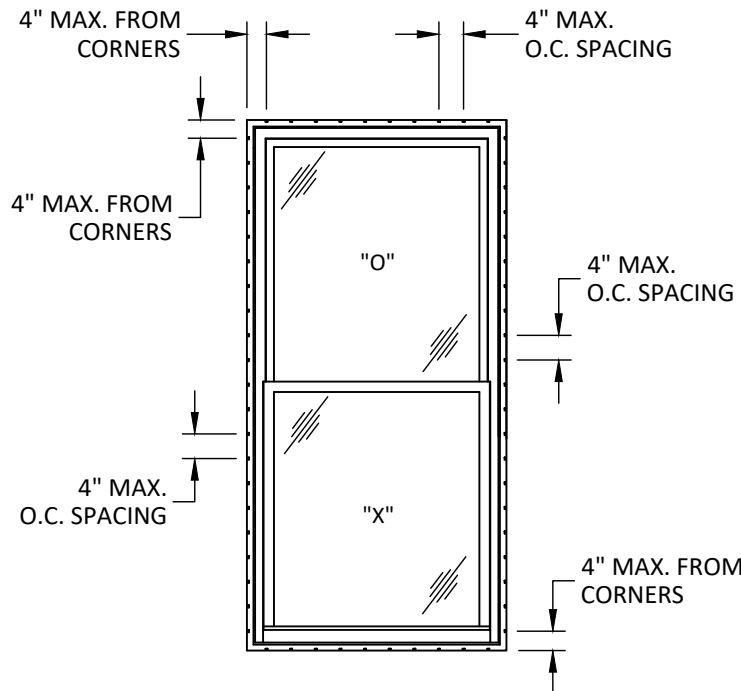

ANCHOR LAYOUT
NAILING FIN

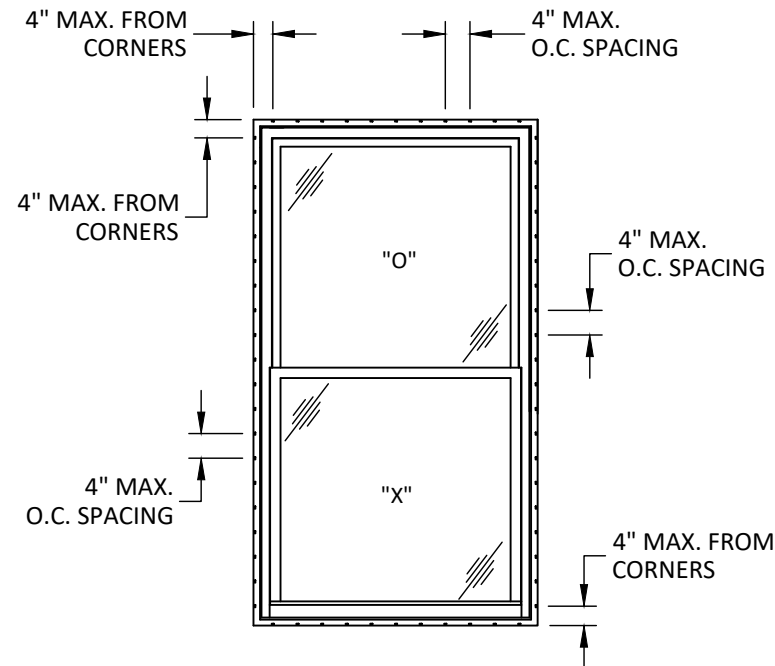

ANCHOR LAYOUT
NAILING FIN

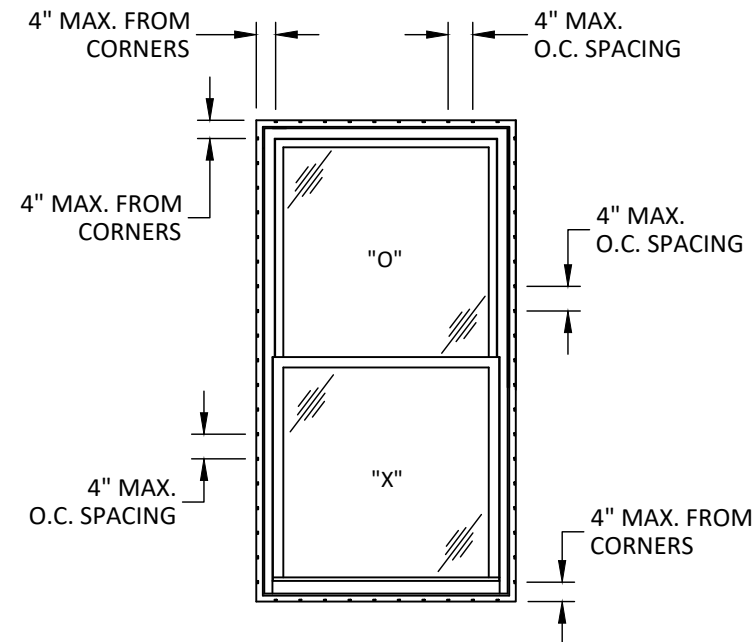

ANCHOR LAYOUT
NAILING FIN



YKK AP AMERICA RESIDENTIAL
101 MARIETTA STREET NW, SUITE 2100
ATLANTA, GA 30303
PH: (678) 838-6000


TITLE: STYLEVIEW CLASSIC ORIEL,
COTTAGE & EQUAL SINGLE
HUNG WINDOW
(NON-HVHZ) (NON-IMPACT)
ELEVATIONS & ANCHOR LAYOUTS

PREPARED BY:
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com




REMARKS	BY	DATE
REINFORCEMENT REV.	LS	05.27.26


THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC
AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC
SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE
FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED
ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC
DOCUMENTS FOR USE WITH THIS DOCUMENT.

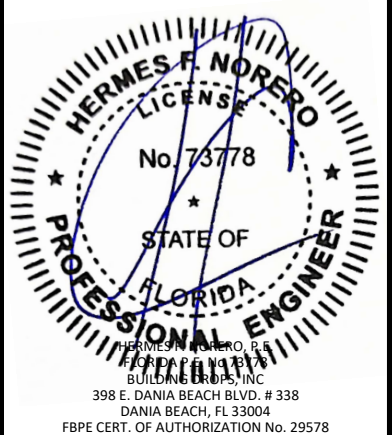

FL #:	FL8114
DATE:	01.08.2024
DWG. BY:	CHK. BY:
SH	HFN
SCALE:	NTS
DWG. #:	YKK296
SHEET:	4

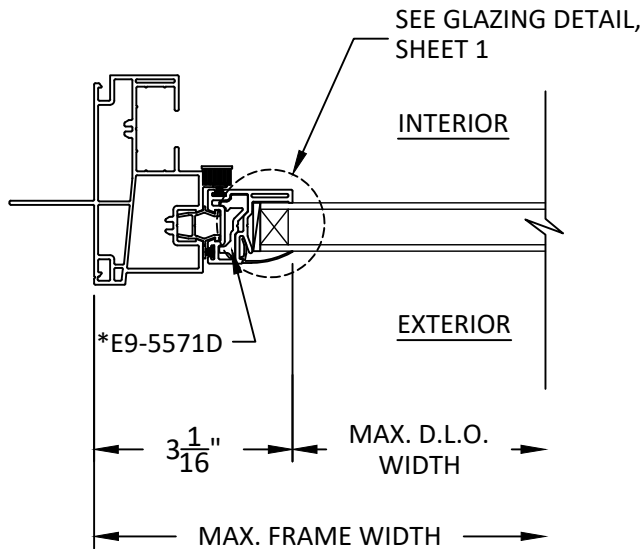


D
6 **HORIZONTAL SECTION**
FIXED LEFT JAMB

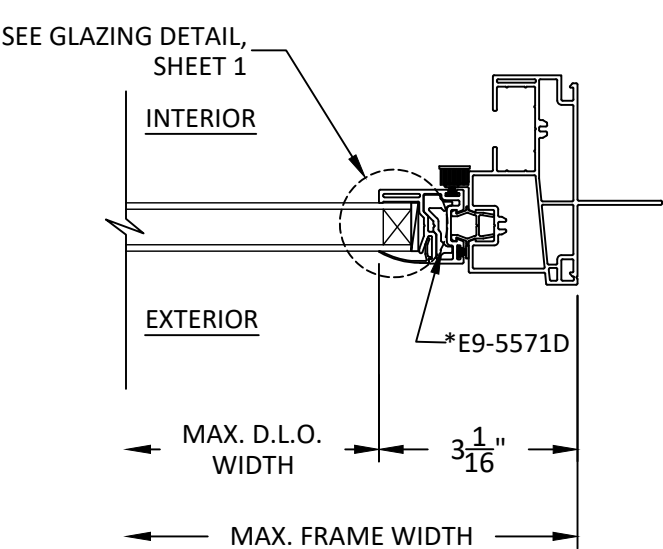


E
6 **HORIZONTAL SECTION**
FIXED RIGHT JAMB

*NOTE: SEE SHEET 5 FOR
REINFORCEMENT TABLE.

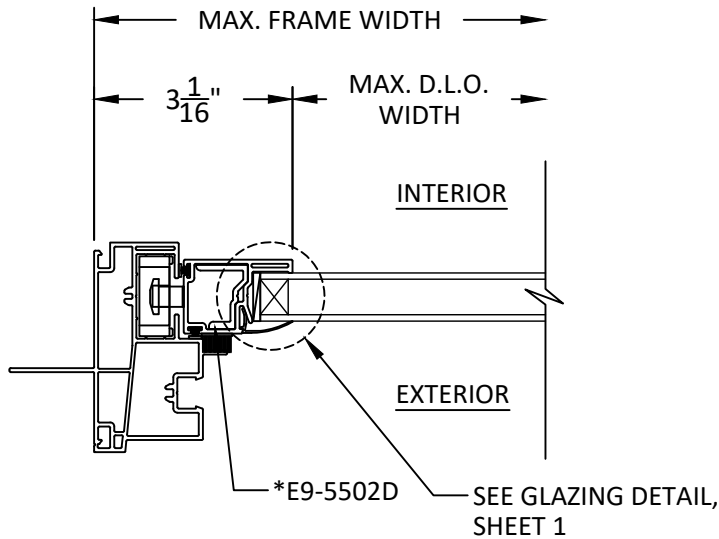

F
6 **HORIZONTAL SECTION**
VENT LEFT JAMB

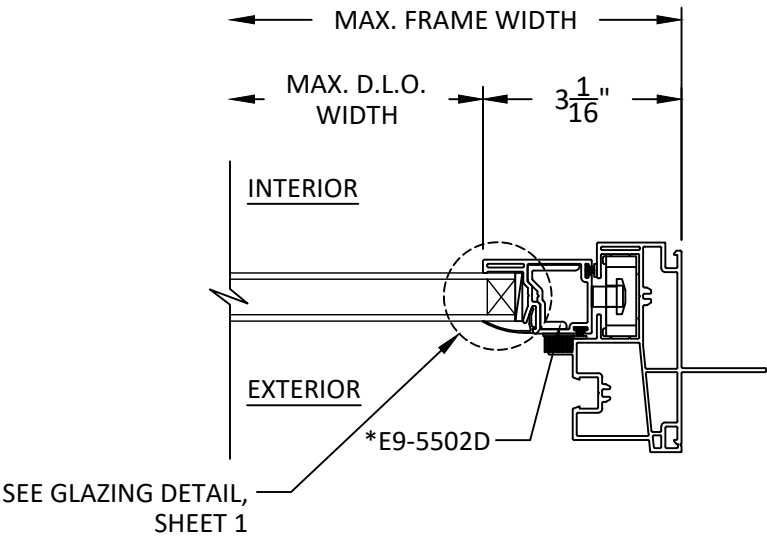

G
6 **HORIZONTAL SECTION**
VENT RIGHT JAMB



Quality
inspires™

YKK AP AMERICA RESIDENTIAL
101 MARIETTA STREET NW, SUITE 2100
ATLANTA, GA 30303
PH: (678) 838-6000


TITLE: STYLEVIEW CLASSIC ORIEL,
COTTAGE & EQUAL SINGLE
HUNG WINDOW
(NON-HVHZ) (NON-IMPACT)

HORIZONTAL SECTIONS

PREPARED BY:  **BUILDING DROPS, INC.**
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com

REMARKS	BY	DATE
REINFORCEMENT REV.	LS	05.27.26


THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

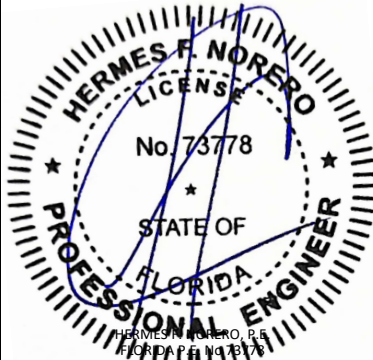


HERMES F. NORERO, P.E.
YKK AP AMERICA, INC.
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD. # 338
DANIA BEACH, FL 33004
FBPE CERT. OF AUTHORIZATION No. 29578

FL #:	FL8114
DATE:	01.08.2024
DWG. BY:	SH
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	YKK296
SHEET:	


c:\users\lucianosanchez\building drops, inc\building drops, inc\building drops, inc\documents\common\projects\ykk ap america, inc\fbc-26-0534 - residential products - reinforcement revision\dwgs\single hung\ykk296.dwg
5/27/2026 10:42 AM

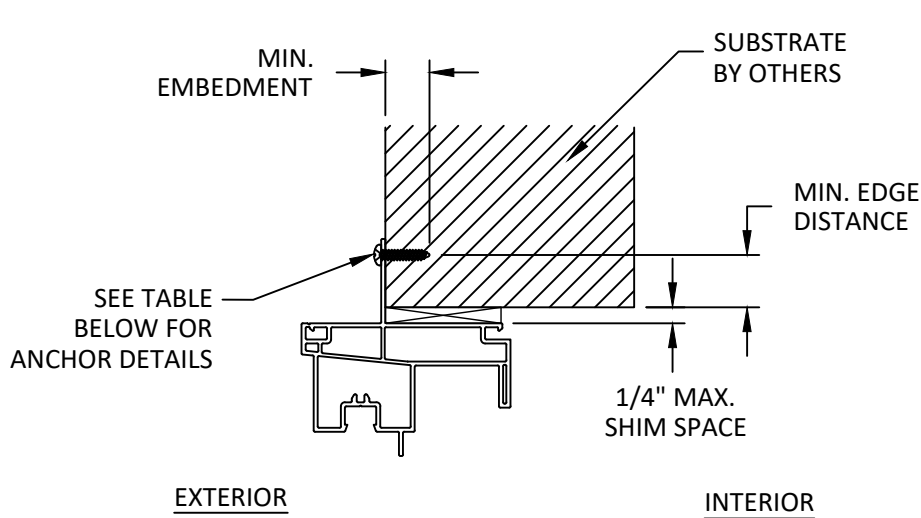

A
7 **VERTICAL SECTION**
HEAD INSTALLATION

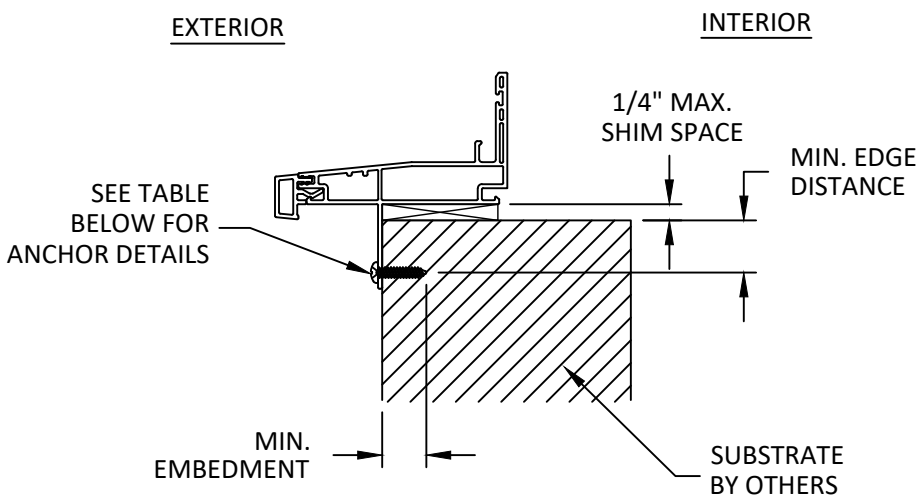

B
7 **VERTICAL SECTION**
SILL INSTALLATION

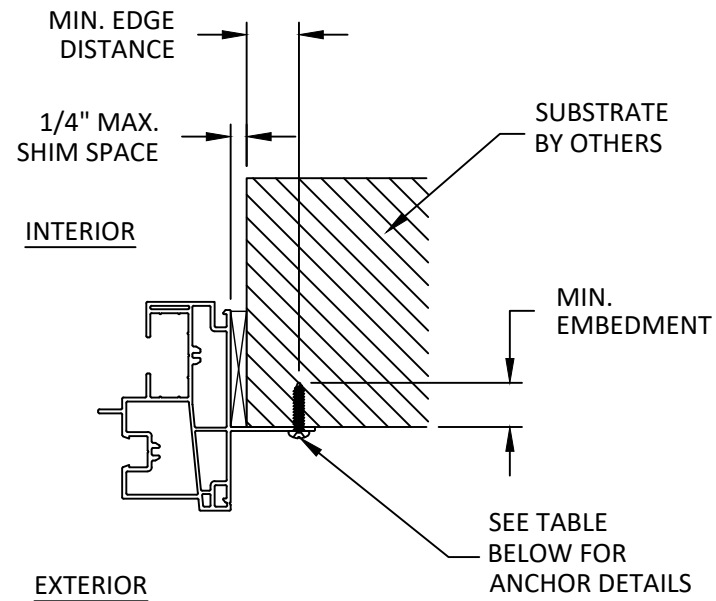

C
7 **HORIZONTAL SECTION**
JAMB INSTALLATION

INSTALLATION NOTES:

- ONE (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN, UNLESS OTHERWISE STATED ON SHEETS 2, 3, & 4.
- INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF ± 1.000 INCH THE DEPICTED LOCATION & SPACING IN THE ANCHOR LAYOUT DETAILS (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE NEXT.
- SHIM AS REQUIRED IN ORDER TO ACHIEVE SQUARE AND PLUMB INSTALLATION WITH LOAD BEARING SHIM(S). MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4 INCH. SHIM WHERE SPACE OF 1/16 INCH OR GREATER OCCURS. SHIM(S) SHALL BE CONSTRUCTED OF HIGH DENSITY PLASTIC OR BETTER.
- MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER, AND SIDING.
- INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.
- INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.

ANCHOR SCHEDULE				
METHOD	SUBSTRATE	ANCHOR SCHEDULE	MIN. EMBEDMENT	MIN. EDGE DISTANCE
NAIL-FIN	WOOD: MIN. SG = 0.55	#10 WOOD SCREW	1.50"	0.75"
	METAL: 18 GAUGE STEEL, MIN. Fy = 33KSI ALUMINUM: 1/8" MIN., 6063-T5	#10 SELF-DRILLING SCREW	3 THREADS MIN PENETRATION BEYOND STRUCTURE	0.50"



Quality
inspires™

YKK AP AMERICA RESIDENTIAL
101 MARIETTA STREET NW, SUITE 2100
ATLANTA, GA 30303
PH: (678) 838-6000

TITLE: **STYLEVIEW CLASSIC ORIEL,
COTTAGE & EQUAL SINGLE
HUNG WINDOW
(NON-HVHZ) (NON-IMPACT)**


INSTALLATION NOTES, ANCHOR DETAILS,
& ANCHOR SCHEDULE

PREPARED BY: **BUILDING DROPS, INC.**
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
REINFORCEMENT REV.	LS	05.27.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

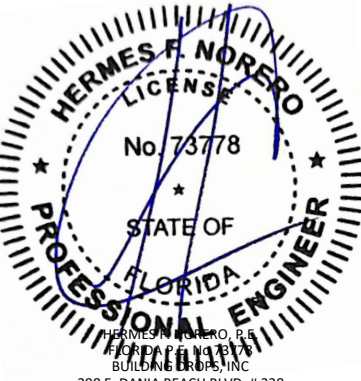

HERMES F. NORERO, P.E.
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD. # 338
DANIA BEACH, FL 33004
FBPE CERT. OF AUTHORIZATION No. 29578

FL #:
FL8114

DATE: **01.08.2024**

DWG. BY:
SH

CHK. BY:
HFN

SCALE: **NTS**

DWG. #: **YKK296**

SHEET:
7

OF 7