
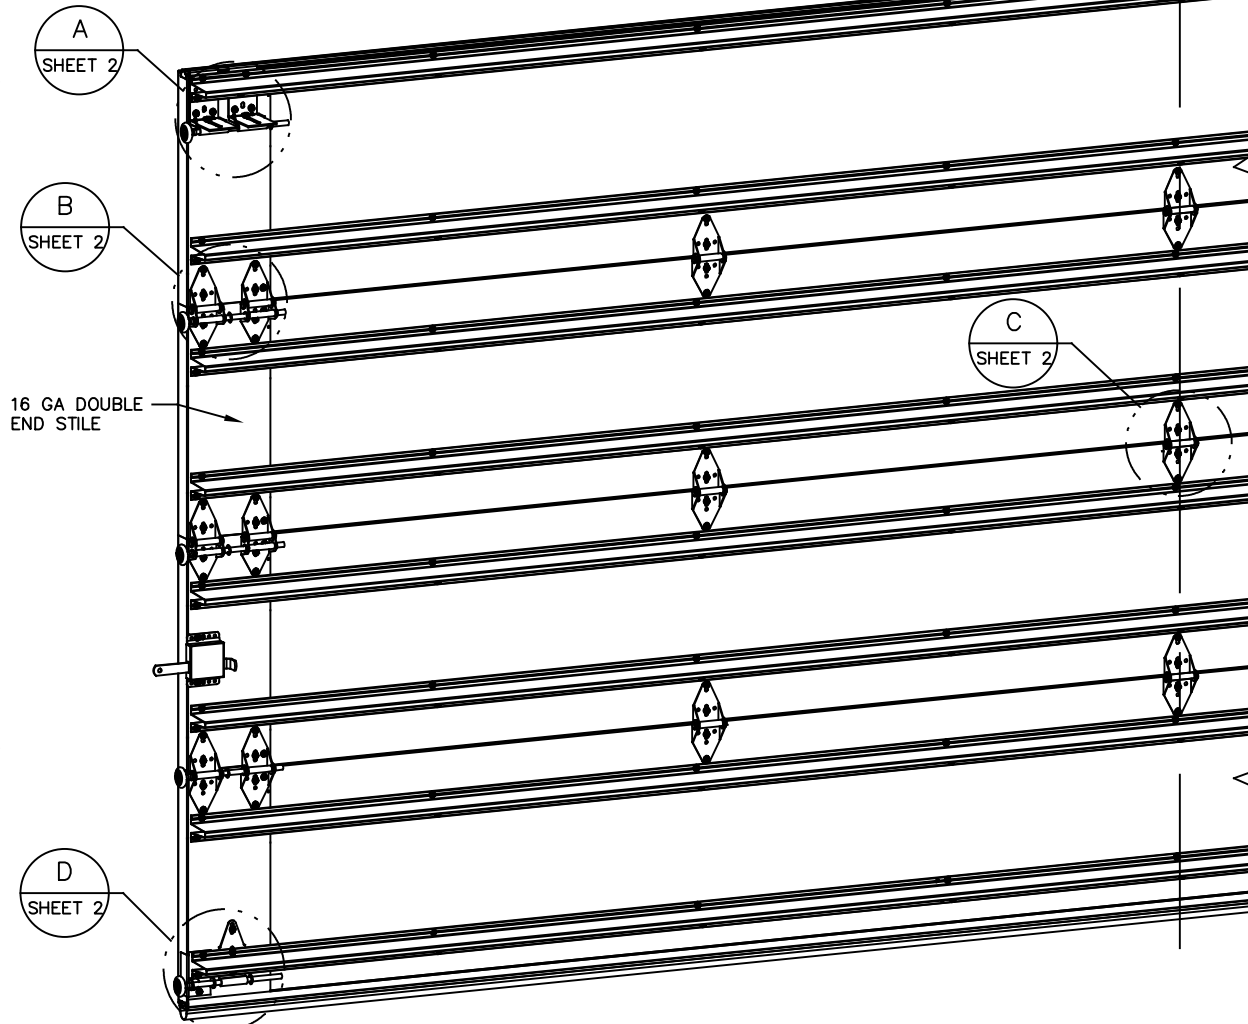


1. VINYL OR WOOD DOOR STOP NAILED A MAXIMUM OF 6" O.C. MUST OVERLAP TOP AND BOTH ENDS OF PANELS MINIMUM 7/16" TO MEET NEGATIVE PRESSURES.

KEY LOCK OR SLIDE
LOCK EACH END (NOT
REQUIRED WITH
OPERATOR - SEE
NOTE 2). SLIDE LOCK
SHOWN FOR CLARITY

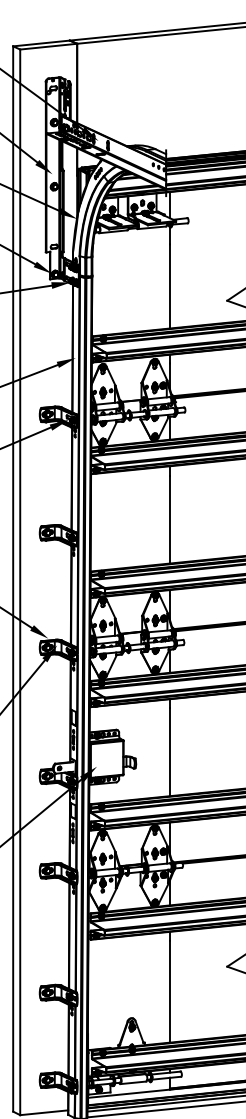

SUPERIMPOSED DESIGN PRESSURE LOADS ON SUPPORTING STRUCTURE		
DOOR WIDTH	DOOR HEIGHT	UNIFORM LOAD EACH JAMB (PLF)
17'-2"	ALL	+257.5/-287.5
18'-2"	ALL	+272.5/-304.3


JAMB BRACKET SCHEDULE			
DOOR HEIGHT	NO. OF SECTIONS	NO. OF JAMB BRACKETS (EACH JAMB)	LOCATION OF CENTERLINE OF JAMB BRACKETS MEASURED FROM BOTTOM OF TRACK (ALL DIMENSIONS $\pm 2"$)
6'-6"	4	7	2" (JB-US), 10" (JB-US), 21-3/4" (JB-US), 29-3/4" (JB-US), 39" (JB-US), 48" (JB-US), 57-1/4" (JB-US)
7'-0"	4	7	2" (JB-US), 10" (JB-US), 21-3/4" (JB-US), 29-3/4" (JB-US), 42" (JB-US), 52-1/2" (JB-US), 63-1/4" (JB-US)
7'-6"	4 OR 5	8	2" (JB-US), 10" (JB-US), 18-3/4" (JB-US), 26-3/4" (JB-US), 36" (JB-US), 45" (JB-US), 54-1/4" (JB-US), 74-1/2" (JB-US)
8'-0"	4 OR 5	8	2" (JB-US), 10" (JB-US), 21-3/4" (JB-US), 29-3/4" (JB-US), 39" (JB-US), 48" (JB-US), 57-1/2" (JB-US), 75-1/2" (JB-US)
> 8'-0"			SEE NOTE BELOW

NOTE:
(JB-US) FOLLOWING DIMENSION DENOTES SLOTTED JAMB BRACKET ATTACHED TO TRACK WITH 1/4-20x9/16" TRACK BOLT AND NUT AS SHOWN ABOVE.

REVISIONS				
ER	REV	DESCRIPTION	DATE	APPROVAL
	B	UPDATED GLAZING	6/03/14	GRT
	C	REV TITLE BLOCK	10/2/2017	ESC
32177	D	ADD MODEL# 7655	11/15/2019	TLC
32442	E	ADD MODEL# 7655	8/2/2020	TLC


STATIC PRESSURE RATINGS	APPROVED SIZES
DESIGN PRESSURE(PSF): +30.0/-33.5	MAX WIDTH: 18'-2"
	MAX HEIGHT: 24'
IMPACT/CYCLIC RATED: YES	MAX SECTION HEIGHT: 24'

John
Christian
Voelkel

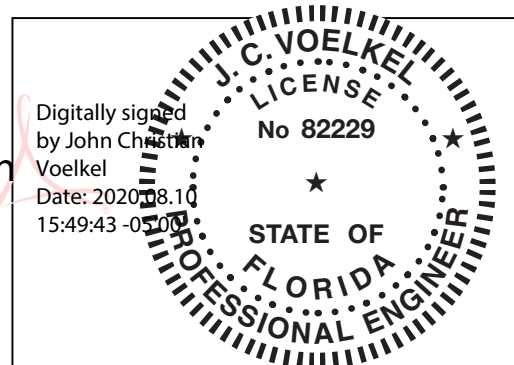

J. CHRISTIAN VOELKEL, PE
312 N. NEW WARRINGTON RD, UNIT 1A
PENSACOLA, FL
FL PE 82229
TX PE 133174

PROFESSIONAL ENGINEER'S SEAL PROVIDED ONLY FOR
VERIFICATION OF WIND LOAD CONSTRUCTION DETAILS.

THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION AND ITS AFFILIATED COMPANIES. THIS DRAWING AND INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT THE PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. NO DISCLOSURE OF ANY OF THIS DRAWING OR INFORMATION IS INTENDED TO OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT THE SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.											
REF DWG	USED ON	 THIRD ANGLE PROJECTION ASME Y14.100 AND Y14.5 APPLY, UNLESS OTHERWISE SPECIFIED. DIMENSIONS ARE IN U.S. CUSTOMARY UNITS.	TOLERANCES UNLESS OTHERWISE SPECIFIED			FINISH N/A	The Genuine. The Original.  LEVISTOWN, TEXAS MATERIAL: NONE	NAME	DATE	DRAWING TITLE: SERIES 5745/5765/7565 7655/515/525	
			HOLE DIAMETER					WHOLE NUMBERS: ± .25 .X ± .1 .XXX ± .010 ANGLES: ± .5°	UNIT OF MEASURE EACH		
			UNDER .251 +.004/- .003								
			.251 TO .500 +.006/- .003								
			OVER .500 +.008/- .003								
FRACTIONS			DRAWING NUMBER		D- 411328						
± 1/16			SCALE:		N.T.S. SHEET 1 OF 2						

