
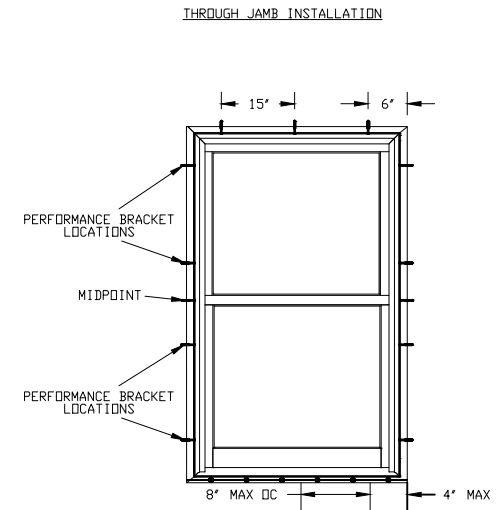
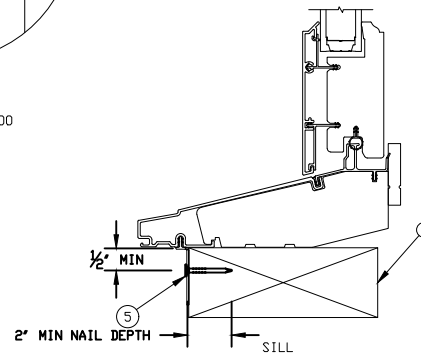
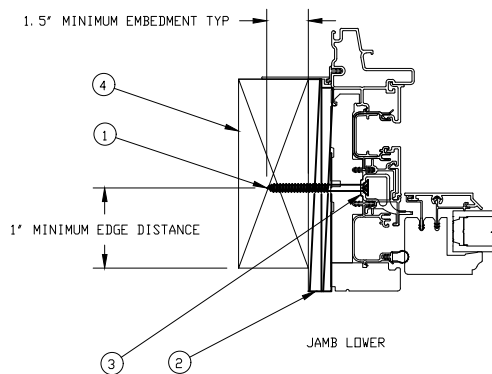

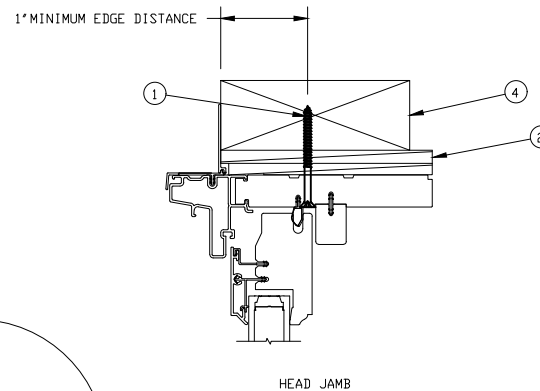


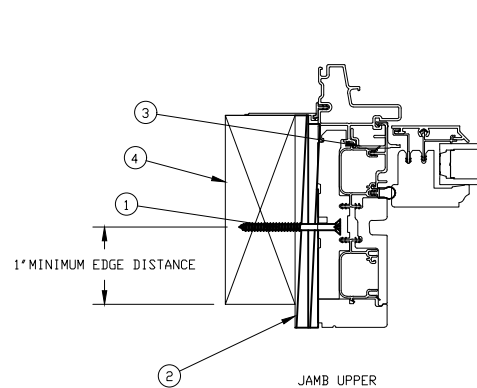

UNIT	MAX FRAME SIZE	DP RATING
UDHG2	65 1/4 X 127 1/2	+30/-30

THROUGH JAMB INSTALLATION METHOD:

- NON STRUCTURAL NAIL FIN OPTIONAL FOR PLACEMENT ONLY
- JAMB SCREWS SPACED 6" FROM CORNERS AND 15" ON CENTER. ONE ADDITIONAL SCREW THROUGH FRAME JUST ABOVE MIDPOINT OF JAMB.
- NAIL FIN REQUIRED ON THE SILL. OPTIONAL ON JAMBS AND HEAD JAMB. SPACED 4" FROM CORNERS AND 8" ON CENTER.
- INSTALL ONE #8 X 3" SCREW AT EACH PERFORMANCE BRACKET LOCATION.

NOTES:

- THIS PRINT IS FOR STRUCTURAL PERFORMANCE ONLY. FOR FLASHING & SEALING REQUIREMENTS, REFER TO THE INSTALLATION INSTRUCTIONS.
- SHIMS:
- A SHIM MUST BE PLACED AT EACH SCREW LOCATION.
- UNIT MUST NOT BE IN DIRECT CONTACT WITH EITHER CONCRETE OR TREATED BUCK MATERIAL.
- IF SHIM SPACE IS LESS THEN 1/4", WRAP THE UNIT ON ALL 4 SIDES WITH WINDOW FLASHING TAPE AS REQUIRED FOR A BARRIER BETWEEN THE UNIT AND CONCRETE OR TREATED LUMBER.
- IF CHEMICALLY TREATED LUMBER IS USED FOR BUCK MATERIAL, FASTENERS INTO THE BUCK MUST BE A MINIMUM OF 0.90 OZ/FT² ZINC HOT DIPPED GALVANIZED OR STAINLESS STEEL TYPE 304 OR 316.

CATEGORY:
DOUBLE HUNG

UNIT TYPE:
UDHG2

ITEM NO	REF NO	DESCRIPTION
5		2" ROOFING NAIL
4		2X WOOD BUCK BY OTHERS
3		PERFORMANCE BRACKET
2		SHIM
1		#8 X 3.000 WOOD SCREW

UNSPECIFIED TOLERANCES

DECIMALS: XX ± .03 XXX ± .012	ANGLE DEG: ± .5
LINEAL: + .125 - .000	FAB LINEAL: ± .125

MATERIAL:
NA

MARVIN 		RESEARCH & DEVELOPMENT	
COLLECTION: ULTIMATE		DWG TYPE: INSTALLATION	
DESCRIPTION: THROUGH JAMB		DWG NO: 00116710	
CHK:	SIZE: B	CLASS: MISC	DWG BY: BRUCE, KEVIN
APP:	SCALE: NA	DATE: 05/15/19	SHEET: 1 OF 1

NOTICE - CONFIDENTIAL INFORMATION

The information in this document is privileged and strictly confidential. The information contained herein shall be used only by Marvin Windows and Doors employees and by those agents or suppliers granted official written permission. If the reader of this document is not the intended recipient, or the employee or agent of

Template Version 13.0