



8000 Designers' Vinyl Series Operating Single Hung 2-Wide Window
Stacked Above 2-Wide Single Hung Picture,
Overall Frame Size 71 1/2" x 95 1/2"
1/2" Horizontal and Vertical Mulls
Nail Fin Installation / Non-Impact

CCL Listing #448-H-002.32

ELEMENT TEST REPORT NUMBER: ESP028012P-2286

8000 Designers' Vinyl Series Operating 2-Wide Stacked Above 2-Wide SH Picture
1/2" Horizontal & Vertical Mulls. Nail Fin Installation / WDMA Instructions / Non-Impact

SHEET: 1 OF 3

UPDATED: 4/30/2018

DRAWN BY: B.K.

TEST REPORT SUMMARY:


- OVERALL MAXIMUM FRAME SIZE 2-WIDE 2-HIGH:
71 1/2" (1816mm) x 95 1/2" (2426mm)
- OVERALL DESIGN PRESSURE: +30.08 / -25.06 psf
- STRUCTURAL TEST PRESSURE: +45.11 / -37.59 psf
- RATING: LC-PG25

INSTALLATION NOTES:

1. Use 2" x _ wood buck
2. Place wood shims every 6-10"
3. 1/4" maximum shim space at head, sill and each jamb
4. Apply a continuous bead of sealant between the nail fin and the buck at the head, sill and side jambs to secure nailing flange to framing material
5. Install #8 X 1-1/4" PPH galvanized screws spaced maximum 2-3" from each corner and maximum 8" on center thereafter, through the integral nail fin into the framing material, at the head, sill and side jambs, 3/8" minimum edge distance.
 - Silicone seal over screw heads
6. 1" Minimum fastener embedment into framing material
7. Maximum 2-wide, 2-high frame window size: **71 1/2" (1816mm) x 95 1/2" (2426mm)**

GENERAL INSTALLATION NOTES:

- Check rough opening for proper size, plumb, level and square.
- Make all necessary adjustments to ensure rough opening is plumb, level & square.
- Sill must be flat, level and capable of supporting the weight of the unit.
- Opening must allow a maximum of 1/4" shim space at head, sill and jambs.
- Wood buck, framing, fasteners, sealant and all wall system materials are provided by others

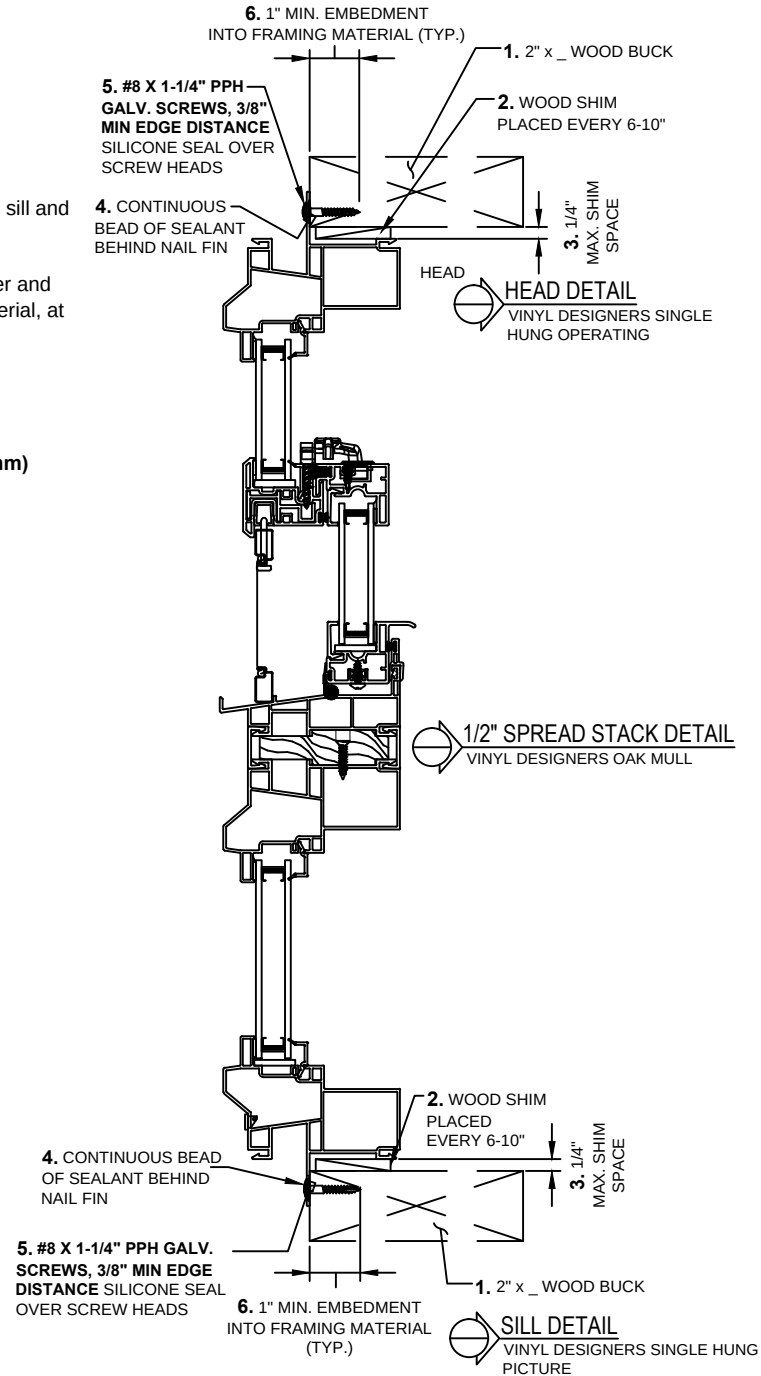



8000 Designers' Vinyl Series Operating Single Hung 2-Wide Window
Stacked Above 2-Wide Single Hung Picture,
Overall Frame Size 71 1/2" x 95 1/2"
1/2" Horizontal and Vertical Mulls
Nail Fin Installation / Non-Impact

CCL Listing #448-H-002.32

ELEMENT TEST REPORT NUMBER: ESP028012P-2286

8000 Designers' Vinyl Series Operating 2-Wide Stacked Above 2-Wide SH Picture
1/2" Horizontal & Vertical Mulls. Nail Fin Installation / WDMA Instructions / Non-Impact


SHEET: 2 OF 3

UPDATED: 4/30/2018

DRAWN BY: B.K.

TEST REPORT SUMMARY:

- OVERALL MAXIMUM FRAME SIZE 2-WIDE 2-HIGH:
71 1/2" (1816mm) x 95 1/2" (2426mm)
- OVERALL DESIGN PRESSURE: +30.08 / -25.06 psf
- STRUCTURAL TEST PRESSURE: +45.11 / -37.59 psf
- RATING: LC-PG25

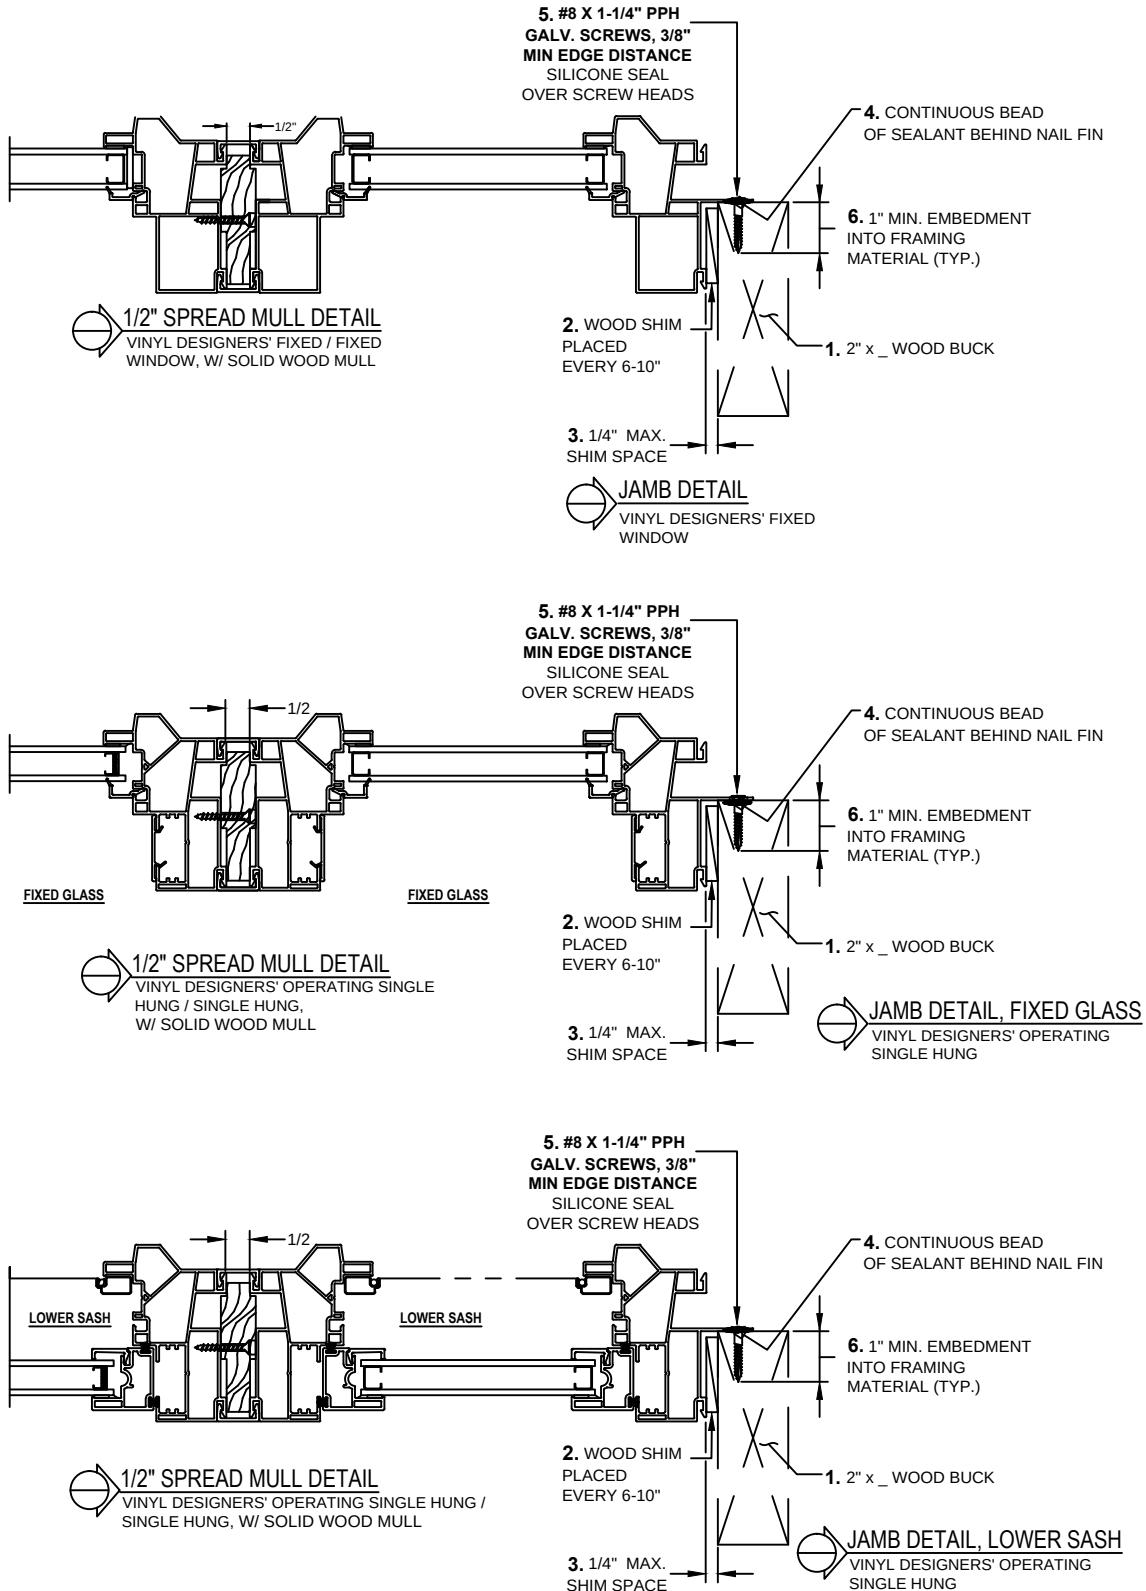

Installation requirements may vary in particular locations and in other types of construction. Proper installation is essential, and Sierra Pacific Windows, recommends consultation with an AAMA Certified Installer, or other qualified, registered building professional before installation of any SPW product. Proper installation of SPW products is the responsibility of the installer. SPW is not responsible for proper installation. SPW is not responsible for the design of, conditions in, or performance of building construction beyond the perimeters of the SPW units. SPW is not responsible for proper integration of the SPW units with the weather-repellent systems of the building.



8000 Designers' Vinyl Series Operating Single Hung 2-Wide Window
Stacked Above 2-Wide Single Hung Picture
Overall Frame Size: 71 1/2" x 95 1/2"
1/2" Horizontal and Vertical Mulls
Nail Fin Installation / Non-Impact

CCL Listing #448-H-002.32

ELEMENT TEST REPORT NUMBER: ESP028012P-2286

**8000 Designers' Vinyl Series Operating 2-Wide Stacked Above 2-Wide SH Picture
1/2" Horizontal & Vertical Mulls. Nail Fin Installation / WDMA Instructions / Non-Impact**

SHEET: 3 OF 3

UPDATED: 4/30/2018

DRAWN BY: B.K.

TEST REPORT SUMMARY:

- OVERALL MAXIMUM FRAME SIZE 2-WIDE 2-HIGH:
71 1/2" (1816mm) x 95 1/2" (2426mm)
- OVERALL DESIGN PRESSURE: +30.08 / -25.06 psf
- STRUCTURAL TEST PRESSURE: +45.11 / -37.59 psf
- RATING: LC-PG25

