




1. EVALUATED FOR USE IN LOCATIONS ADHERING TO THE FLORIDA BUILDING CODE, EXCLUDING THE HIGH VELOCITY HURRICANE ZONE (HVHZ), AND WHERE PRESSURE REQUIREMENTS AS DETERMINED BY ASCE 7, MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES, DOES NOT EXCEED THE DESIGN PRESSURES LISTED.
2. WHEN INSTALLED IN THE WIND-BORNE DEBRIS REGION, HURRICANE PROTECTIVE SYSTEM (SHUTTERS) IS REQUIRED.
3. MAXIMUM DOOR D.L.O. AREA NOT TO EXCEED 1,071 SQ IN. INDIVIDUAL LITE D.L.O. WIDTH NOT TO EXCEED 21". INDIVIDUAL LITE D.L.O. HEIGHT NOT TO EXCEED 35".

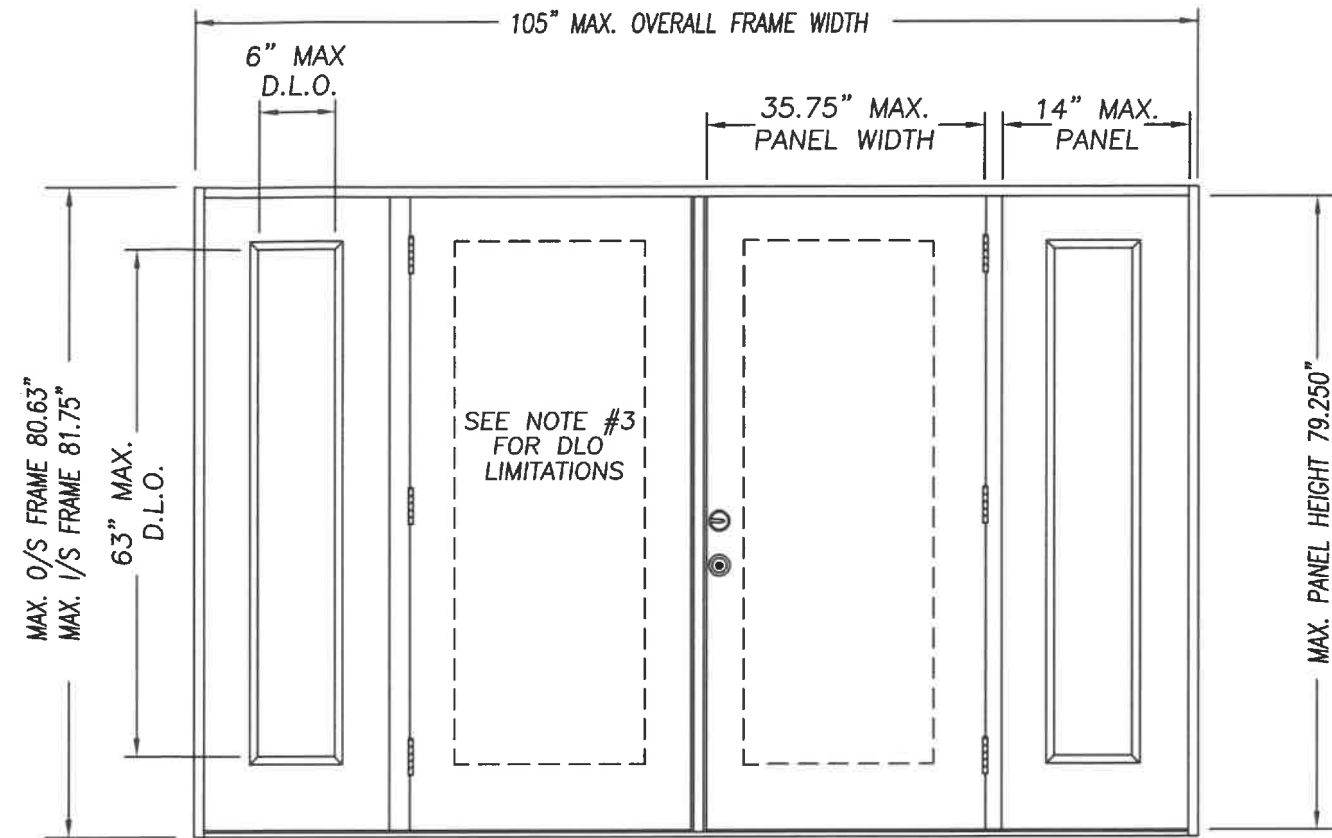

A diagram of a double door. The left door features a large, vertical rectangular window. The right door has a grid of six smaller rectangular windows arranged in three rows and two columns. There are two circular handles on the right door, one above the other, positioned to the right of the window grid.








TABLE OF CONTENTS	
SHEET #	DESCRIPTION
1	TYPICAL ELEVATIONS & GENERAL NOTES
2	ANCHORING LOCATIONS & DETAILS
3	ANCHORING LOCATIONS & DETAILS

		DESIGN PRESSURE RATING	
CONFIG	MAX WIDTH	INSWING	OUTSWING
X	37.5"	+50.0 / -50.0	+50.0 / -50.0
XX	74"	+50.0 / -50.0	+50.0 / -50.0
OX or XO	53.25"	+50.0 / -50.0	+50.0 / -50.0
OXO	69"	+50.0 / -50.0	+50.0 / -50.0
OXXO	105"	+50.0 / -50.0	+50.0 / -50.0



KURT BALTHAZOR
FLORIDA P.E.
#56533

DATE:	7/18/19		
SCALE:	N.T.S.		
DWG. BY:	SWS		
CHK. BY:			
DRAWING NO.:	DWG-MA-FL0234-19		
SHEET	1	OF	3

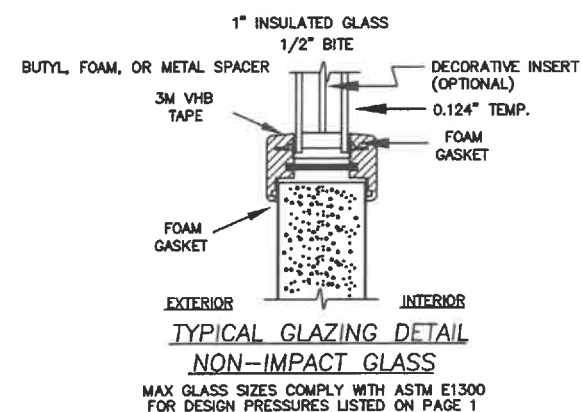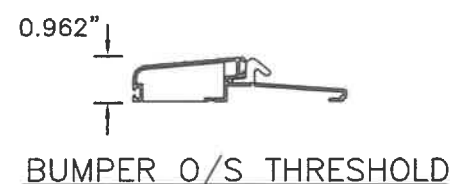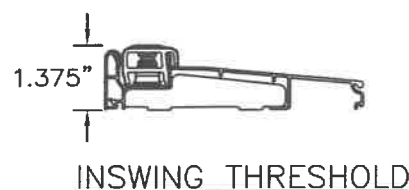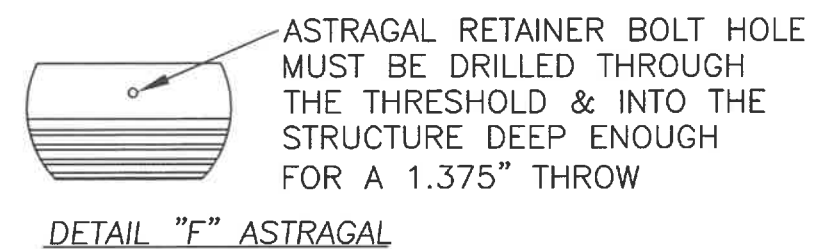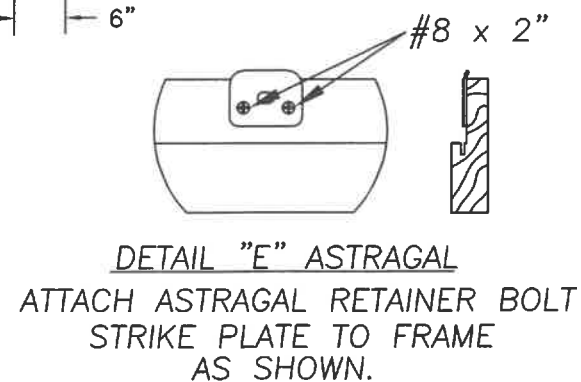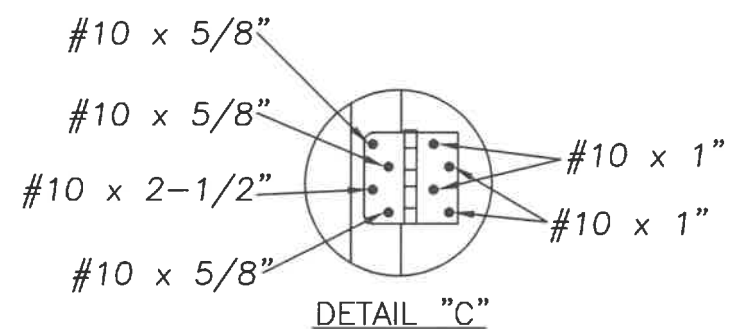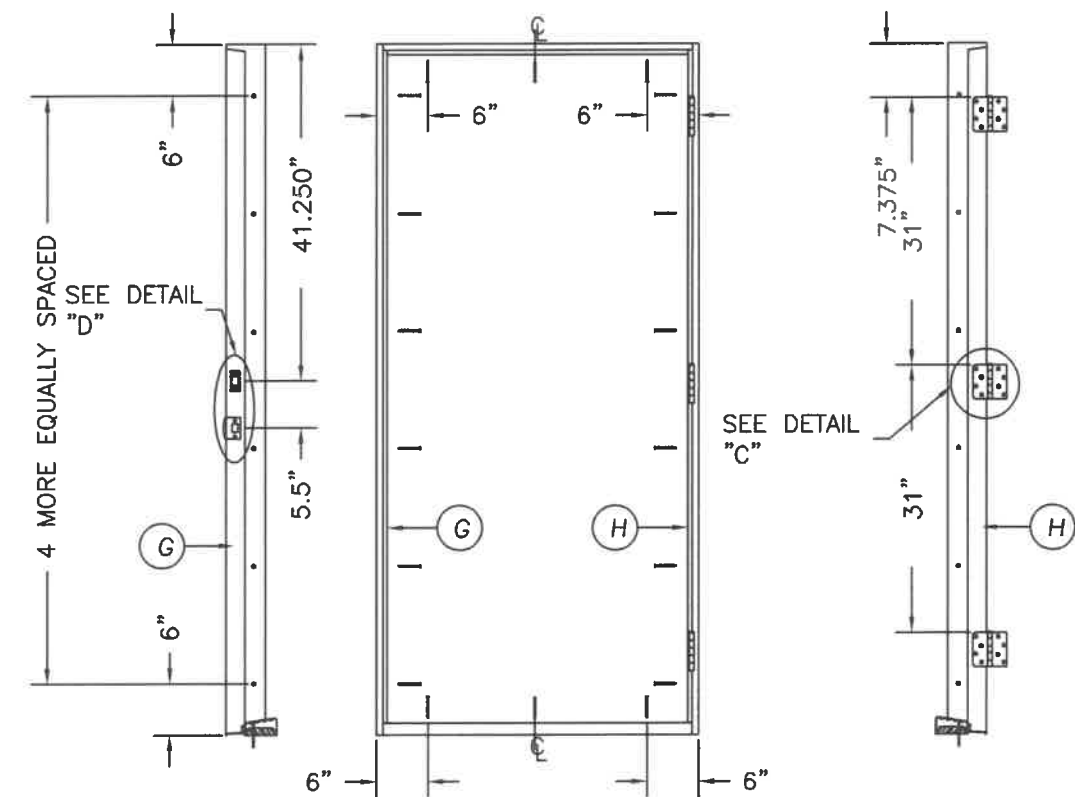

MASONITE INTERNATIONAL CORP.
1955 POWIS ROAD
WEST CHICAGO, IL 60185

[illegible]

