


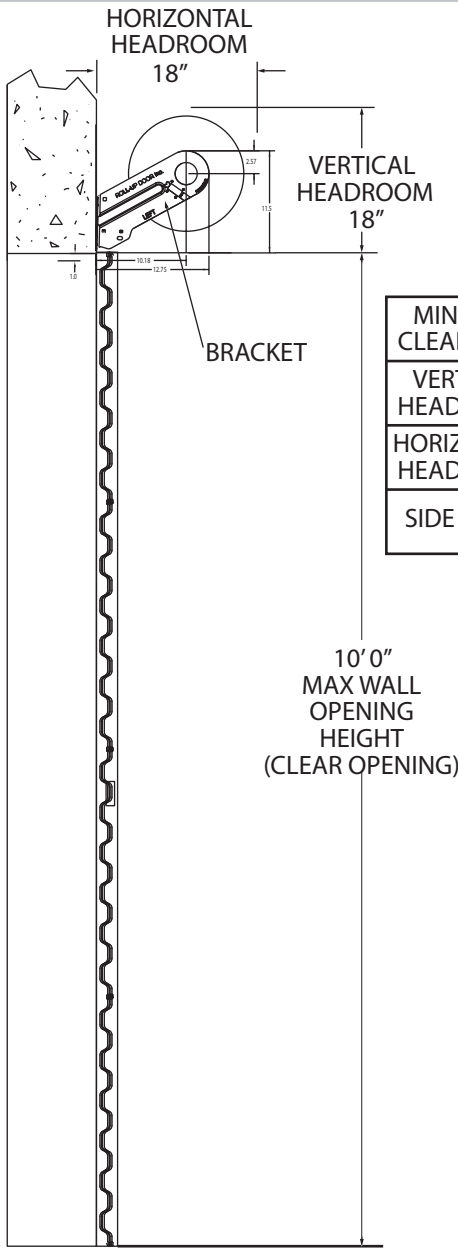





MINIMUM HEADROOM CLEARANCE DIMENSIONS	
VERTICAL HEADROOM	18"
HORIZONTAL HEADROOM	18"
SIDE ROOM	3 1/2"

JAMS
(STEEL, WOOD
OR CONCRETE)

LATCH
(OPPOSITE SIDE)

10'0" MAX WALL
OPENING
HEIGHT
(CLEAR OPENING)

SIDE VIEW

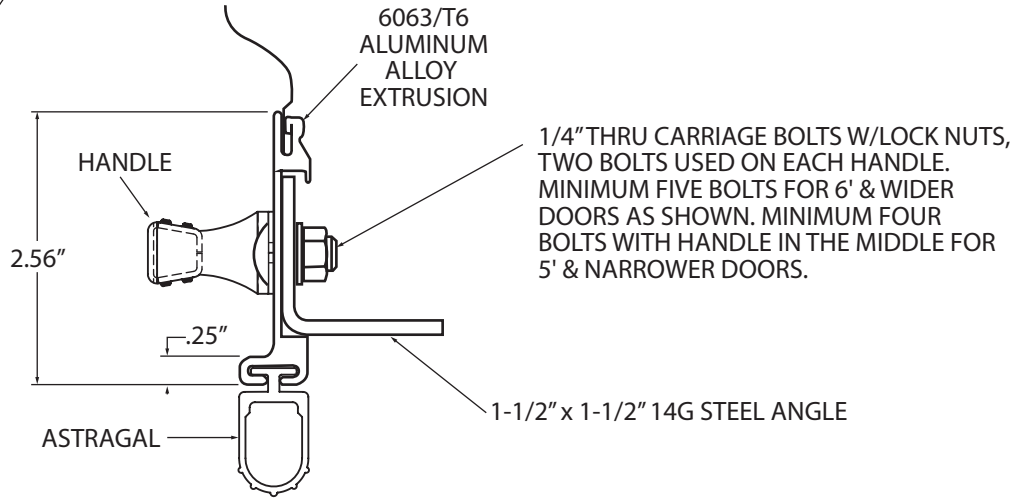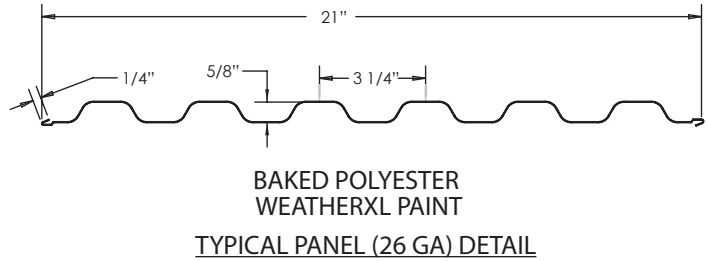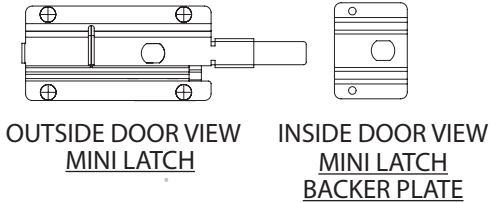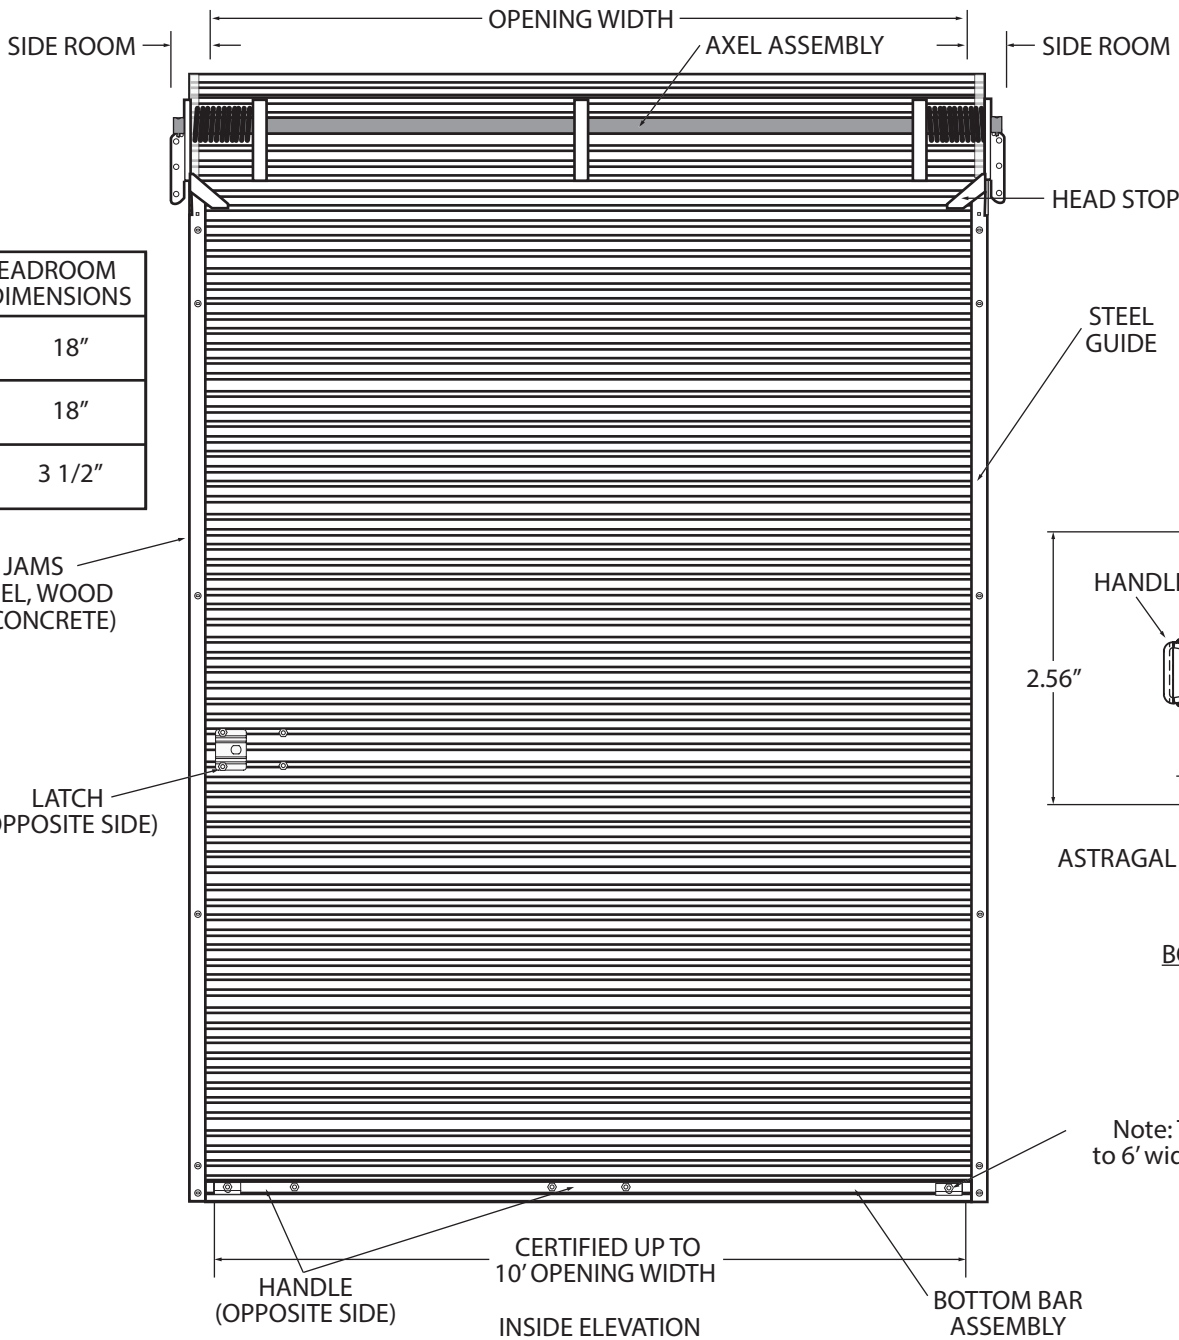


DOOR SCHEDULE	
DOOR WIDTH	DESIGN PRESSURE(PSF)
3'0"	+84.0 -84.0
4'0"	+61.3 -61.3
5'0"	+39.2 -39.2
6'0"	+27.2 -27.2
7'0"	+20 -20
8'0"	+15.3 -15.3
9'0"	+12.1 -12.1
10'0"	+9.8 -9.8

Note: The bottom bar uses 4 bolts for doors up to 6' wide all doors over 6' and up to 10' use 5 bolts

This item has been digitally signed and sealed by Bala Sockalingam, PE, on the date indicated.

Printed copies of this document are not considered signed and sealed and this signature must be verified on any electronic copies.

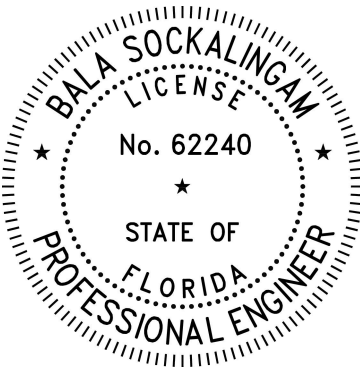

2026.09.28
17:08:44 -05'00'

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ROLL UP DOOR INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ROLL UP DOOR INC. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/16"$
ANGLES: $\pm 3^\circ$
TWO PLACE DECIMAL ± 0.01
THREE PLACE DECIMAL ± 0.005


MATERIAL
26G Steel
FINISH
Coated

	NAME	DATE
DRAWN	KMN	10/03/24
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		
COMMENTS:		


ROLL UP DOOR INC.
505 Main Street Blackshear,GA 31516
912-449-9352

TITLE:
TDI S2F 1000 DOOR SERIES
MAX. 10' 0" WIDE x MAX 10'-0" HIGH


SIZE	DWG. NO.	REV
A	S2F-1001	A

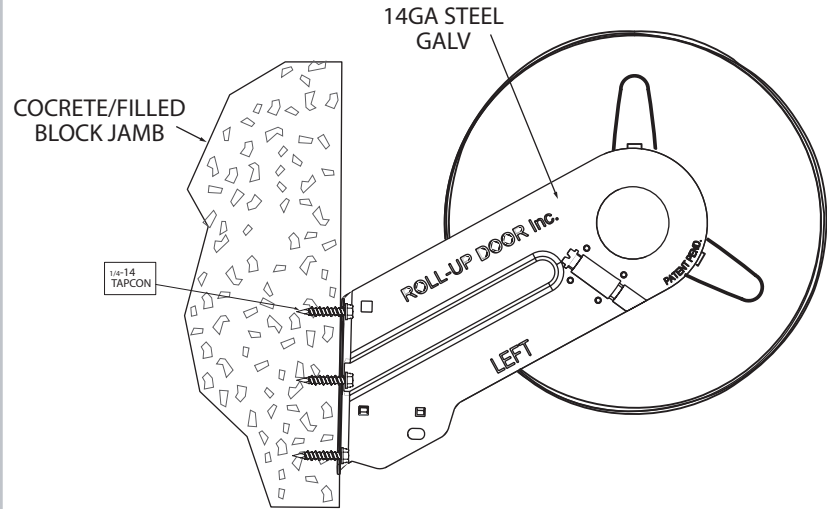


BRACKET MOUNTING TO MASONRY DETAIL

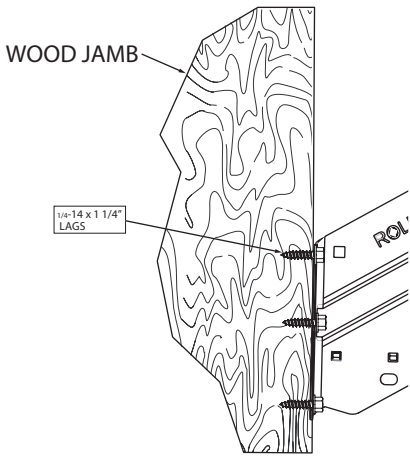

BRACKET MOUNTING TO WOOD DETAIL

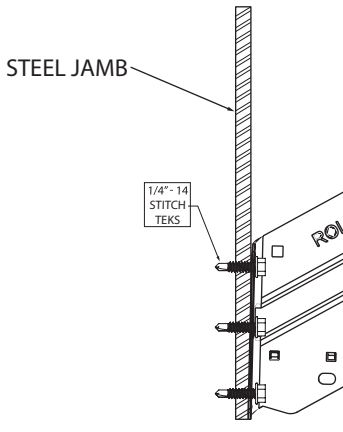


BRACKET MOUNTING TO STEEL DETAIL

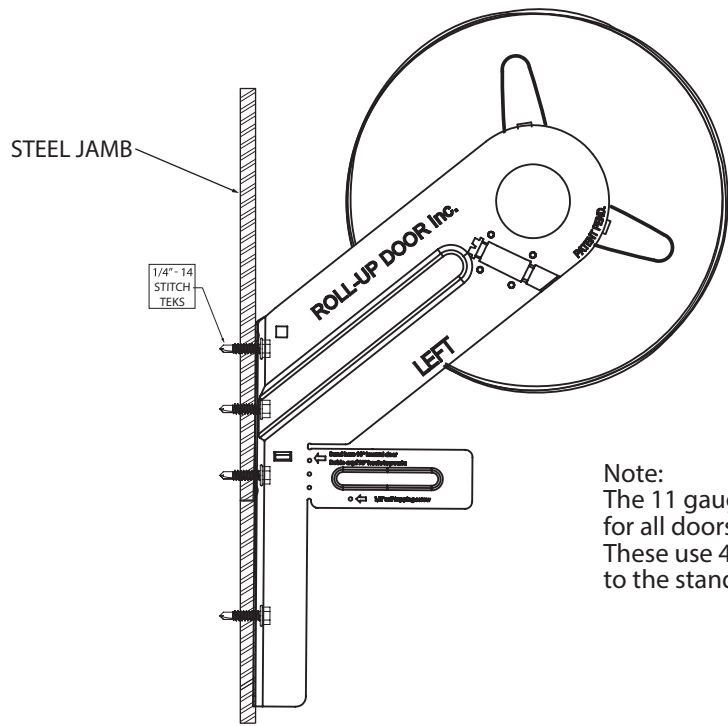

EXTENDED BRACKET MOUNTING TO STEEL DETAIL


Note:
The 11 gauge extended bracket is used
for all doors 9' and over.
These use 4 fasteners as opposed
to the standard 14 gauge bracket using 3.

+2" +.75"
FELT
PE SILK, SYNTHETIC

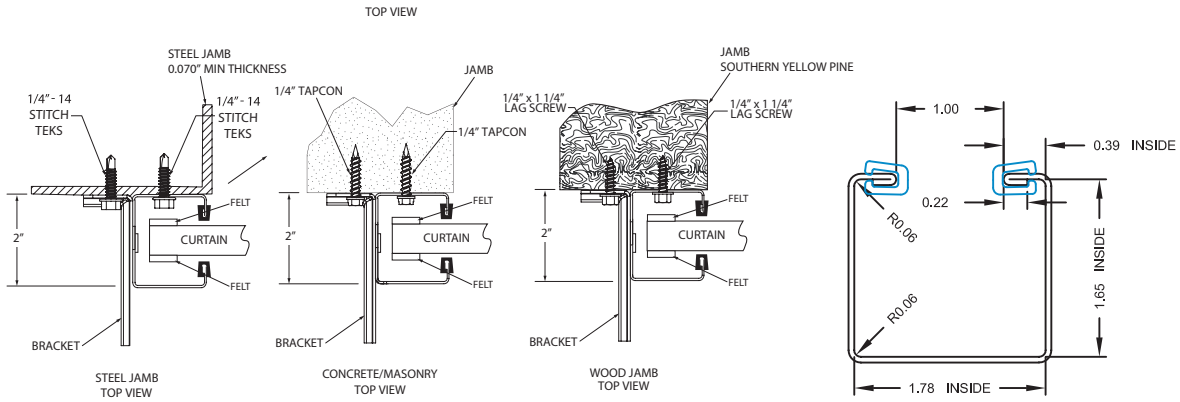

GUIDE MOUNT DETAIL

GUIDE DETAIL
18GA STEEL

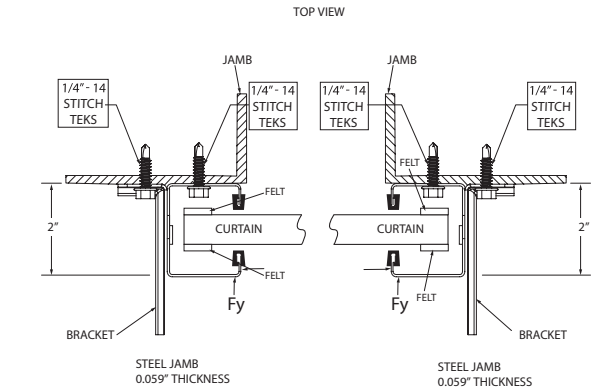

RIGHT AND LEFT GUIDE MOUNT DETAIL LOAD DIAGRAM
MIN 0.070\"/>

10 ft	Fy	+/- 49	lbs/ft
9 ft	Fy	+/- 54.5	lbs/ft
8 ft	Fy	+/- 61.2	lbs/ft
7 ft	Fy	+/- 70	lbs/ft
6 ft	Fy	+/- 81.6	lbs/ft
5 ft	Fy	+/- 98	lbs/ft
4 ft	Fy	+/- 122.6	lbs/ft
3 ft	Fy	+/- 126	lbs/ft

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
ROLL UP DOOR INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
ROLL UP DOOR INC. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/16$ "
ANGLES: $\pm 3^\circ$
TWO PLACE DECIMAL ± 0.01
THREE PLACE DECIMAL ± 0.005

MATERIAL
26G Steel
FINISH
Coated

	NAME	DATE
DRAWN	KMN	4/21/22
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		
COMMENTS:		

RDI ROLL UP DOOR INC.
505 Main Street Blackshear,GA 31516
912-449-9352

TITLE: RDI S2F 1000 DOOR SERIES
MAX. 10' 0" WIDE x MAX 10'-0" HIGH

SIZE A	DWG. NO. S2F-1001	REV A
------------------	----------------------	-----------------