



NEMO|etc.

Certificate of Authorization #32455
353 Christian Street, Unit #13
Oxford, CT 06478
(203) 262-9245

ENGINEER

EVALUATE

TEST

CONSULT

EVALUATION REPORT BY FLORIDA P.E.

Owens Corning Roofing and Asphalt, LLC

One Owens Corning Parkway
Toledo, OH 43659
(740) 321-6345

Evaluation Report I40510.02.12-R12

FL15216-R11

Date of Issuance: 02/17/2012

Revision 12: 10/19/2022

SCOPE:

This Evaluation Report is issued under [Rule 61G20-3](#) and the applicable rules and regulations governing the use of construction materials in the State of Florida. The documentation submitted has been reviewed by Robert Nieminen, P.E. for use of the product under the Florida Building Code. The products described herein have been evaluated for compliance with the [7th Edition \(2020\) Florida Building Code sections noted herein](#).

DESCRIPTION: RhinoRoof U10, RhinoRoof U20, ABC Pro Guard 20 and SRS TopShield TS20 Roof Underlayments

LABELING: Labeling shall be in accordance with the requirements of the Accredited Quality Assurance Agency noted herein and FBC 1507.1.1.


CONTINUED COMPLIANCE: This Evaluation Report is valid until such time as the named product(s) changes, the referenced Quality Assurance or production facility location(s) changes, or Code provisions that relate to the product(s) change. Acceptance of our Evaluation Reports by the named client constitutes agreement to notify NEMO ETC, LLC of any changes to the product(s), the Quality Assurance or the production facility location(s). NEMO ETC, LLC requires a complete review of its Evaluation Report relative to updated Code requirements with each Code Cycle.

ADVERTISEMENT: The Florida Product Approval Number (FL#) preceded by the words "NEMO P.E. Evaluated" may be displayed in advertising literature. If any portion of the Evaluation Report is displayed, then it shall be done in its entirety.

INSPECTION: Upon request, a copy of this entire Evaluation Report shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This Evaluation Report consists of pages 1 through 4.

Prepared by:

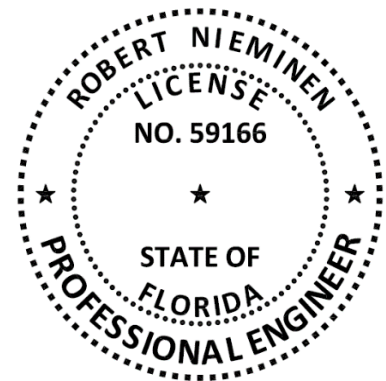

CERTIFICATION OF INDEPENDENCE:

1. NEMO ETC, LLC does not have, nor does it intend to acquire or will it acquire, a financial interest in any company manufacturing or distributing products it evaluates.
2. NEMO ETC, LLC is not owned, operated or controlled by any company manufacturing or distributing products it evaluates.
3. Robert Nieminen, P.E. does not have nor will acquire, a financial interest in any company manufacturing or distributing products for which the evaluation reports are being issued.
4. Robert Nieminen, P.E. does not have, nor will acquire, a financial interest in any other entity involved in the approval process of the product.
5. This is a building code evaluation. Neither NEMO ETC, LLC nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.

ROOFING COMPONENT EVALUATION:
1. SCOPE:

Product Category: Roofing
Sub-Category: Underlayment
Product Approval Method: Method 1, Option D – Codified Material, Evaluation by Engineer
Compliance Statement: RhinoRoof U10, RhinoRoof U20, ABC Pro Guard 20 and SRS TopShield TS20 Roof Underlayments, as produced by Owens Corning Roofing and Asphalt, LLC, have demonstrated compliance with the following sections of the 7th Edition (2020) Florida Building Code through testing in accordance with applicable sections of the following Standards. Compliance is subject to the [Installation Requirements](#) and [Limitations of Use](#) set forth herein.

2. STANDARDS:

SECTION	PROPERTIES	STANDARD	YEAR
1507.1.1.1(2&3, Exception), 1507.1.1.1(5) / R905.1.1.1(2&3, Exception), R905.1.1.1(5)	Tear strength	ASTM D4533	2015
1507.1.1.1(2&3, Exception), 1507.1.1.1(5) / R905.1.1.1(2&3, Exception), R905.1.1.1(5)	Tensile strength	ASTM D5035	2011
1507.1.1.1(5) / R905.1.1.1(5)	Liquid water transmission	ASTM D4869	2016
1518.4, RAS 115	Unrolling, Breaking Strength, Pliability	ASTM D226	2009
TAS 110	Accelerated Weathering	ASTM D4798	2011

3. REFERENCES:

ENTITY	EXAMINATION	REFERENCE	DATE
PRI (TST5878)	ASTM D226 / D4798 / D4869	OCF-394-02-07.4	01/06/2020
PRI (TST5878)	ASTM D226 / D4798	OCF-464-02-02.2	01/06/2020
PRI (TST5878)	ASTM D4533 / D5035 / D4798	1378T0109	10/15/2020
PRI (TST5878)	ASTM D4533 / D5035	1378T0127	10/15/2020
PRI (TST5878)	ASTM D8257-20	1378T0138	02/25/2021
PRI (TST5878)	ASTM D8257-20	1378T0139	03/23/2021
PRI (TST5878)	ASTM D8257-20	1378T0141	05/18/2021
ITS (QUA1673)	ITS Audit Manual	3144566COQ-006A	09/10/2020
ITS (QUA1673)	Quality Control	Service Confirmation	08/13/2021
ITS (QUA1673)	Quality Control	Florida BCIS	Current

4. PRODUCT DESCRIPTION:

TABLE 1: EVALUATED UNDERLAYMENTS			
PRODUCT	SPECIFICATION	PLANT(S)	DESCRIPTION
RhinoRoof U10	1507.1.1.1(2&3, Exception), 1507.1.1.1(5) / R905.1.1.1(2&3, Exception), R905.1.1.1(5)	Qingdao, China	Multilayered polymer woven coated synthetic roof underlayment
RhinoRoof U20	1507.1.1.1(2&3, Exception), 1507.1.1.1(5) / R905.1.1.1(2&3, Exception), R905.1.1.1(5)	Qingdao, China Silvassa, India	Multilayered polymer woven coated synthetic roof underlayment
ABC Pro Guard 20	1507.1.1.1(2&3, Exception), 1507.1.1.1(5) / R905.1.1.1(2&3, Exception), R905.1.1.1(5)	Silvassa, India	Multilayered polymer woven coated synthetic roof underlayment
SRS TopShield TS20	1507.1.1.1(2&3, Exception), 1507.1.1.1(5) / R905.1.1.1(2&3, Exception), R905.1.1.1(5)	Silvassa, India	Multilayered polymer woven coated synthetic roof underlayment

5. LIMITATIONS:

- 5.1 This is a building code evaluation. Neither NEMO ETC, LLC nor Robert Nieminen, P.E. are, in any way, the Designer of Record for any project on which this Evaluation Report, or previous versions thereof, is/was used for permitting or design guidance unless retained specifically for that purpose.
- 5.2 This Evaluation Report pertains to above-deck roof components. Roof decks and structural members shall be in accordance with FBC requirements to the satisfaction of the Authority Having Jurisdiction.
- 5.3 This Evaluation Report does not include evaluation of fire classification. Refer to **FBC 1505** or **FBC HVHZ 1516** for requirements and limitations regarding roof assembly fire classification. Refer to **FBC 2603** for requirements and limitations concerning the use of foam plastic insulation.
- 5.4 **RhinoRoof U10, RhinoRoof U20, ABC Pro Guard 20 and SRS TopShield TS20 Roof Underlayments** may be used with any prepared roof cover where the product is specifically referenced within FBC approval documents. If not listed, a request may be made to the Authority Having Jurisdiction for approval based on this evaluation combined with supporting data for the prepared roof covering.
- 5.5 Allowable roof covers:

TABLE 2: ROOF COVER OPTIONS					
FBC SECTION:	1507.2	1507.3	1507.4 & 1507.5	1507.7	1507.8 & 1507.9
FBC HVHZ SECTION:	TAS 110(S10), RAS 115	TAS 110(S11), RAS 118, 119 & 120	RAS 133	TAS 110(S11)	RAS 130
UNDERLAYMENT	ASPHALT SHINGLES	ROOF TILE	METAL	SLATE OR SLATE-TYPE SHINGLES	WOOD
RhinoRoof U10	Yes	No	Yes	No	NON-HVHZ: No HVHZ: Yes
RhinoRoof U20	Yes	No	Yes	No	NON-HVHZ: No HVHZ: Yes
ABC Pro Guard 20	Yes	No	Yes	No	NON-HVHZ: No HVHZ: Yes
SRS TopShield TS20	Yes	No	Yes	No	NON-HVHZ: No HVHZ: Yes

5.6 Exposure Limitations:

TABLE 3: EXPOSURE LIMITATIONS	
UNDERLAYMENT	MAXIMUM EXPOSURE (DAYS)
RhinoRoof U10	90
RhinoRoof U20	90
ABC Pro Guard 20	90
SRS TopShield TS20	90

6. INSTALLATION:

- 6.1 **RhinoRoof U10, RhinoRoof U20, ABC Pro Guard 20 and SRS TopShield TS20 Roof Underlayments** shall be installed in accordance with the manufacturer’s published installation instructions subject to the Limitations set forth in [Section 5](#) herein and the specifics noted below.
- 6.2 Re-fasten any loose decking panels, and check for protruding nail heads. Sweep the substrate thoroughly to remove any dust and debris prior to application.

6.3 RhinoRoof U10, RhinoRoof U20, ABC Pro Guard 20 and SRS TopShield TS20 Roof Underlayments:

6.3.1 NON-HVHZ Jurisdictions:

6.3.1.1 Shall be installed in compliance with requirements for a synthetic underlayment in **FBC 1507.1.1.1(2, Exception), 1507.1.1.1(3, Exception) or 1507.1.1.1(5)** or **FBC Residential R905.1.1.1(2, Exception), R905.1.1.1(3, Exception) or R905.1.1.1(5)** for the type of prepared roof covering to be installed, and the manufacturer’s installation instructions. FBC requirements take precedence over the manufacturer’s installation instructions.

6.3.1.2 Fasteners:

Minimum fasteners shall be corrosion resistant, ring-shank cap nails shall be as set forth in **FBC 1507.1.1.1 or 1507.1.1.3 or FBC Residential R905.1.1.1 or R905.1.1.3**.

6.3.2 HVHZ Jurisdictions:

- 6.3.2.1 Shall be installed in a shingle fashion with minimum 4-inch wide side (horizontal) laps and minimum 6-inch wide end laps, and fastened in accordance with FBC HVHZ 1518.2:
- grid pattern of 12 inches between the overlaps, with 6-inch spacing at the overlaps

7. BUILDING PERMIT REQUIREMENTS:

As required by the Building Official or Authority Having Jurisdiction to properly evaluate the installation of this product.

8. MANUFACTURING PLANTS:

Contact the named QA entity for manufacturing facilities covered by **F.A.C. Rule 61G20-3** QA requirements. Refer to [Section 4](#) herein for products and production locations having met codified material standards.

9. QUALITY ASSURANCE ENTITY:

[Intertek Testing Services NA Inc. – QUA1673](#); (312) 906-7779; maura.norlander@intertek.com

- END OF EVALUATION REPORT -