BUILDING DROPS
1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

Product Evaluation Report

of

EFCO Corporation
Series 325X Project Out Window
(Non-HVHZ) (Non-Impact)

for

Florida Product Approval

FL# FL15953

Report No. 11076

Current Florida Building Code

Method:	**1 – D (Engineering Evaluation)**
Category:	**Windows**
Sub – Category:	**Projected**
Product:	**Series 325X Project Out Window**
Materials:	**Aluminum 6063-T6**
Product Dimensions:	**See Installation Instructions, EFC007**

Prepared for:
EFCO Corporation
1000 County Road
Monett, MO 65708

Prepared by:
Hermes F. Norero, P.E.
Florida Professional Engineer # 73778
Date: 07/20/2026

Contents:

Evaluation Report Pages 1 – 3

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2026.08.02 17:57:35 -04'00'

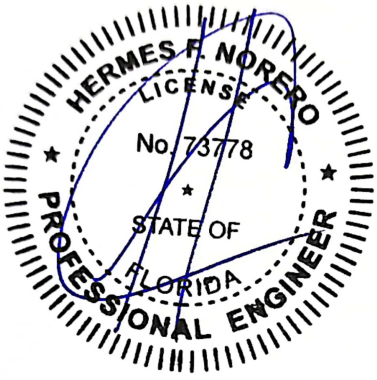

Hermes F. Norero, P.E.
Florida No. 73778

Manufacturer:	**EFCO Corporation**
Product Category:	Windows
Product Sub-Category:	Projected
Compliance Method:	State Product Approval Method (1)(d)
Product Name:	**Series 325X Project Out Window (Non-HVHZ) (Non-Impact)**

Scope:

This is a Product Evaluation Report issued by Hermes F. Norero, P.E. (FL # 73778) for **EFCO Corporation** based on Method 1d of the State of Florida Product Approval, Department of Business and Professional Regulation - Florida Building Commission.

Hermes F. Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the current Florida Building Code.

See Installation Instructions **EFC007**, signed and sealed by Hermes F. Norero, P.E. (FL # 73778) for specific use parameters.

Limits of Use:

1. This product has been evaluated and is in compliance with the current Florida Building Code, **excluding** the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with Chapter 16 of the current Florida Building Code and **does require** an impact resistant covering.
4. Site conditions that deviate from the details of installation instructions **EFC007** require further engineering analysis by a licensed engineer or registered architect.
5. See Installation Instructions **EFC007** for size and design pressure limitations.

954.399.8478 954.744.4738
BUILDINGDROPS.COM CONTACT@BUILDINGDROPS.COM

Quality Assurance:

The manufacturer has demonstrated compliance of manufacture of products in accordance with the current Florida Building Code for manufacturing under a quality assurance program audited by an approved quality assurance entity through **Intertek Testing Services NA, Inc. - QA Entity.**
(FBC Organization # QUA1673)

Performance Standards:

The product described herein has been tested per:

- AAMA/WDMA/CSA 101/I.S.2/A440-17

Referenced Data:

1. Product Testing performed by **Architectural Testing, Inc. (an Intertek company) - Plano, TX**
   (FBC Organization # TST1910)
   Report #: K5399.01-801-47, Report Date: 01/14/2020

Installation:

Refer to Installation Instructions (**EFC007**) for anchor spacing and more details of the installation requirements.

Design Pressure:

Refer to Installation Instructions (**EFC007**) for design pressures based on size, configuration, and glass types.

954.399.8478 954.744.4738
BUILDINGDROPS.COM CONTACT@BUILDINGDROPS.COM