

EVALUATION REPORT

Title:	Aluminum Curtain Wall		
Report #:	SM2017-015R4		
Manufacturer:	Sun Metals Systems, Inc. 5008 Tampa West Blvd Tampa, FL 33634	Technical Contact:	Eric VanHorn, P.E. VanHorn Engineering, LLC
Prepared by:	Gordon Thomas, P.E. Mason, OH 45040 Florida # 46718	Date:	~~December 27, 2017~~ ~~October 4, 2020 - revised~~ July 22, 2025 - revised

I. OVERVIEW / SCOPE

The following evaluation report provides a review of a revised FBC application for an Aluminum Curtain Wall. The current configuration is listed under FL 25560 and this evaluation will review the requirements to receive approval for the 8th Edition (2023) Florida Building Code.

II. REFERENCE MATERIAL

The following reference materials were provided in support of the product evaluation


1. Florida Product Approval FL 25560
2. Sun Metals Dwg FL-25560.3, Dated 7/14/25
3. Intertek - Architectural Testing Inc., 2658 Electronics Way, West Palm Beach FL 33407
Test Report # G8646.01-450-32-r0, Signed and Sealed by Justin P. McDonald, P.E, Dated 12/14/17

III. EVALUATION CRITERIA & LIMITATIONS OF USE

The product has been evaluated and is in compliance with the 8th Edition (2023) Florida Building Code structural requirements including the "High Velocity Hurricane Zone". When used in "HVHZ", this product is required to be protected with an impact resistant covering. The drawings cited below and as illustrated in Section 10 of the test report are an explicit part of this evaluation report. The text of this report cannot address all design details (fastener size, spacing) but relies upon the illustrations of these drawings.

All testing frame specimens listed in test reports referenced above were conducted as follows:


TAS 202-94 & ASTM E330, (Uniform Static Air Pressure)
AAMA 501.1-05, (Water Penetration)
ASTM E283-04 (2012), (Air Leakage)
ASTM E331-00 (2009), (Water Penetration)
Products listed meet the deflection recovery requirements
Products listed meet static pressure air infiltration

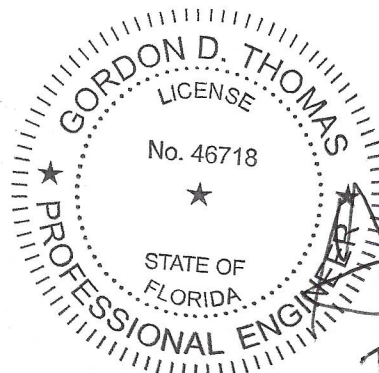

The following curtain walls were reviewed and approved:

Product Name	Product Type	Size (H x W)	Design Pressures	Impact Rating	Dwg
Series 700SG	Aluminum Curtain Wall Captured	144" x 60"	+/- 75 PSF	Non-Impact	FL-25560.3
Series 700SG	Aluminum Curtain Wall Butt Glazed	144" x 60"	+/- 75 PSF	Non-Impact	FL-25560.3

The product anchors were confirmed via calculations for both concrete and steel mounting. Steel anchors were checked against tested quantities.

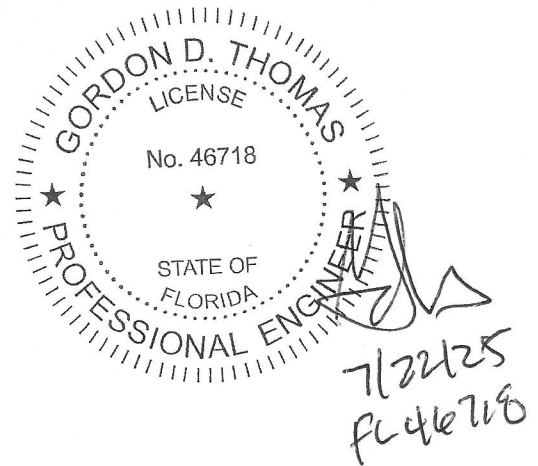

Certification of Independence of Evaluation Entity

I hereby certify that (1) I have no financial interest in Sun Metals Systems, LLC; (2) I am an independent licensed Professional Engineer in the State of Florida and; (3) I comply with the criteria of independence as stated in 9B-72.110 (3), F.A.C. and 9B-72.110(4), F.A.C.