

STRUCTURAL SOLUTIONS, P.A.*

Structural Engineering ■ Investigations ■ Consulting

GARAGE DOOR EVALUATION REPORT

Garage Door No.:	IBC-1009-130-11-S		Test Date:	7/18-7/20/2017		Project No.:	17-044			
Design Pressures:	+24.3 psf, -28.5 psf		Report Date:	10/27/2020		Model #	1000/Superflex			
Test Pressures:	+36.5 psf, -42.8 psf		Test Location:	American Test Lab, Inc., Brevard, NC						
ASCE 7-16 Criteria:	Up to 5 Feet of Door Width in Zone 5; Roof Slope ≤ 10°; Enclosed Building									
	Exp. B, 30' MRH		Exp. C, 15' MRH		Exp. C, 25' MRH		Exp. D, 15' MRH		Exp. D, 25' MRH	
	168 mph		152 mph		145 mph		138 mph		133 mph	

Reference Test Report and Drawing:

- American Test Lab, Inc. report number ATLNC-0718.02-17 dated 4/10/2018
- Entrematic Drawing number IBC-1009-130-11-S dated 2/14/2018

Description of Test Specimen:

9'-2"x8'-0" Model 1000/Superflex, 24/27 ga steel and Superflex garage door as shown in drawing IBC-1009-130-11-S.

Test Standards and Report Conclusion:

The above referenced Test Report states the following:

- The tests were conducted in accordance with ASTM E1886-05, E1996-09, F588-07; and ANSI / DASMA 115-2012.
- The weight of the missile used for the Large Missile Impact Test was 9.3 lbs.
- All tests were conducted with no deviations.
- The test was witnessed and certified by David Johnson, PE, 1122 Calvert Road, Brevard, NC (FL PE #00061915)
- American Test Lab is accredited by IAS, Certification #TL-423.


Summary:

The 9'-2"x8'-0" Model 1000/Superflex as described on drawing IBC-1009-130-11-S meets or exceeds the testing criteria as described above. By comparison to the construction of the 9'-2"x8'-0" Model 1000/Superflex, the following doors also meet or exceed the above testing criteria, when constructed in accordance with drawing IBC-1009-130-11-S:

- 9'-2" x 8'-0" Amarr 2432/Superflex doors (which is an alternate name for Model 1000/Superflex)
- Door models 1000/Superflex and Amarr 2432/Superflex with widths up to 9'-2" and heights up to 24'-0"
- Two windows may be installed in one steel section (38-1/16" x 10-5/8" x 1/4" polycarbonate)

To the best of my knowledge, the above garage door conforms to the requirements of the Florida Building Code 7th Edition (2020).

Submitted By:

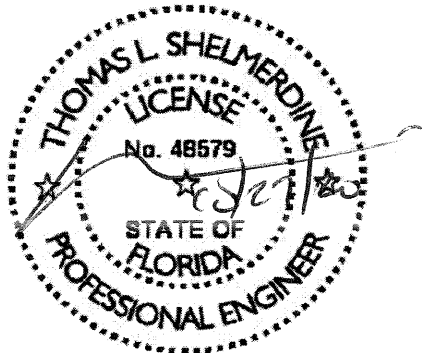

STRUCTURAL SOLUTIONS, P.A.* (*Florida: dba Structural Solutions of North Carolina, Inc., Firm #29412)

Thomas L. Shelmerdine, PE (NC PE #14654; Florida PE #0048579)

5921-G West Friendly Avenue ■ Greensboro, North Carolina 27410 ■ (336) 856-2686 ■ www.sspa.biz ■ NC Firm #C-1096